2011 PRODUCT CATALOG

E9000.0000F

NEW ITEMS

PAGE..4

Experience air infusion brewing with bubble action from the trifecta™.

PAGE..37

The G9WD-HD delivers unparalleled grind weight accuracy for the right amount of coffee every time.

PAGE..42

Simple solution for exceptional espresso beverages from the sleek high volume super-automatic Black & White 3 S2.

We are *A Partner You Can Count On*™ in the

BrewWISE® GPR DBC® brewers digitally manage the brewing process from start to finish and feature portable server solutions.

PAGE..32

The G2 trifecta grinder yields an expanded range of precise grinds.

PAGE..40

The Infusion Series® High Volume tea and coffee brewers can meet a variety of customer demands all in a narrow footprint.

PAGE..52

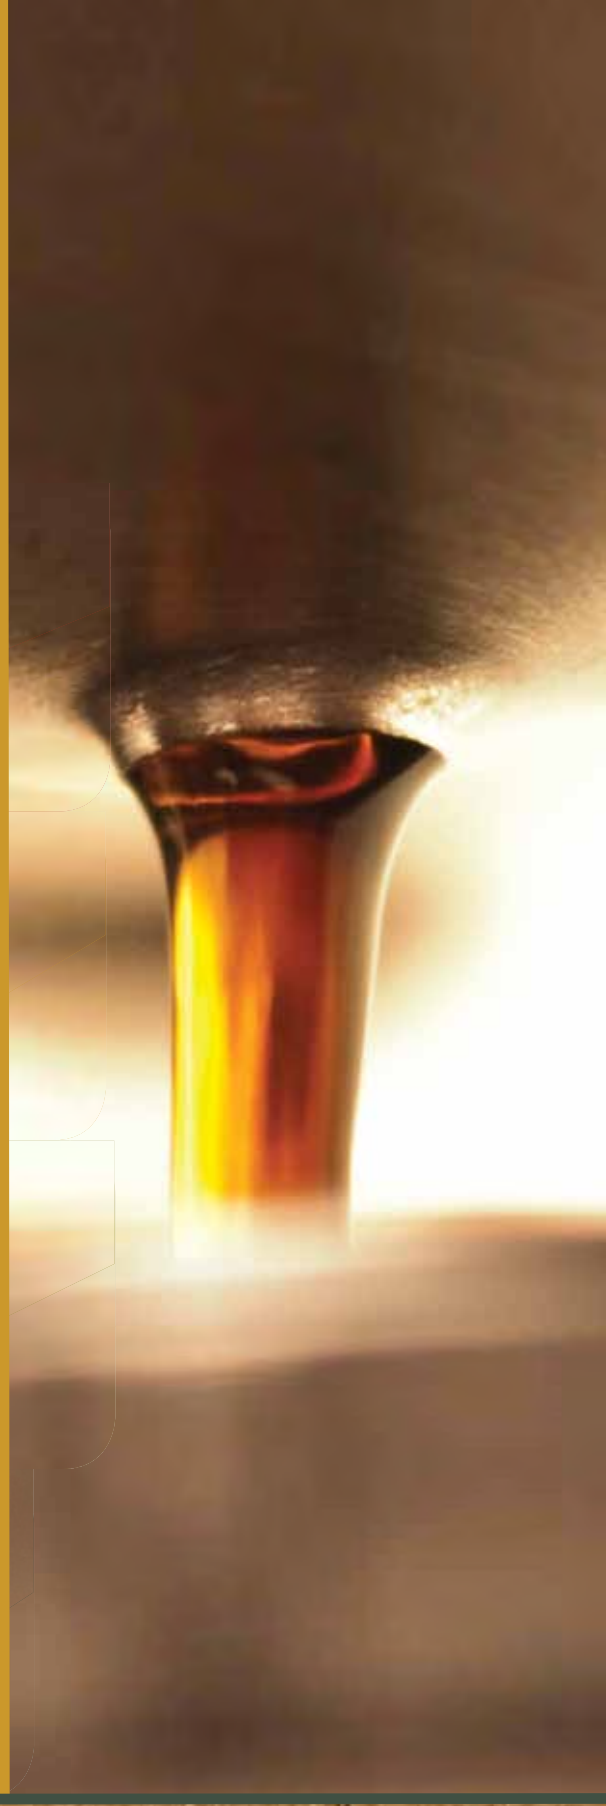

journey to a perfect cup.

BUNN®

WWW.BUNN.COM

TABLE OF CONTENTS

Single Serve Brewers 3

Air Infusion Brewer 4

Pourover Brewers 5

Automatic Decanter Brewers and Urns 9

Thermal Coffee Brewers 17

Satellite Coffee Brewers 25

Coffee Grinders 36

Espresso Systems 41

Liquid Coffee High Volume Systems 44

Iced Tea and Coffee Brewers 48

Hot Beverage Systems 55

Cold Beverage Systems 59

Frozen Beverage Systems 63

Precise Temperature Water Dispensers 65

Related Products

- Servers 23-24,27-28,31,35
- Iced Tea/Coffee Dispensers 53-54
- Water Quality Filter Systems 66
- Paper Filters 67
- Decanters and Warmers 68
- Universal Airpot Racks and Coffee-isers 69
- Stock Funnels 70
- Special Purpose Funnels 71
- Drip Trays 72-73

BUNNserve® 74

E9000.0000F 1/11 © 2004 Bunn-O-Matic Corporation

CATALOG ICON LEGEND

International models available

A BUNN Innovation

Detailed decsriptions are available on pages 1-2.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

AGENCY SYMBOLS

UL Listed

NSF International

Electrical Testing Labs Safety

Electrical Testing Labs Sanitation

Electrical Testing Labs Canada

Canadian Safety

UL Classified Environmental & Public Health

TRADEMARKS

392; AutoPOD, AXIOM, BrewLOGIC, BrewMETER, Brew Better Not Bitter, BrewWISE, BrewWIZARD, BUNN Espress, BUNN Family Gourmet, BUNN Gourmet, BUNN Pour-O-Matic, BUNN, BUNN with the stylized red line, BUNNlink, Bunn-OMatic, Bunn-O-Matic, BUNNserve, BUNNSERVE with the stylized wrench design, Cool Froth, DBC, Dr. Brew stylized Dr. design, Dual, Easy Pour, EasyClear, EasyGard, FlavorGard, Gourmet Ice, Gourmet Juice, High Intensity, iMIX, Infusion Series, Intellisteam, My Café, PowerLogic, Quality Beverage Equipment Worldwide, Safety-Fresh, savemycoffee.com, Scale-Pro, Silver Series, S ngle, Smart Funnel, Smart Hopper, SmartWAVE, Soft Heat, SplashGard, The Mark of Quality in Beverage Equ pment Worldwide, ThermoFresh, A Partner You Can Count On, Air Brew, Air Infusion, Beverage Bar Creator, Beverage Profit Calculator, Brew better, not bitter., BUNNSource, Coffee At Its Best, Cyclonic Heating System, Digital Brewer Control, Nothing Brews L ke a BUNN, Pouring Profits, Respect Earth, Respect Earth with the stylized leaf and coffee cherry design, Signature Series, Tea At Its Best, Phase Brew, The Horizontal Red Line, Titan, tr fecta, Ultra, Velocity Brew are either trademarks or registered trademarks of Bunn-O-Matic Corporation.

BUNN SUSTAINABILITY FEATURES

RoHS Compliant: In keeping with our Susta nability Mission, BUNN electronics design can be made with NO hazardous substances and part assemblies are recyclable wherever possible.

Lead-free Solder is specified in the production of all electronic control boards.

Energy Saver Modes will lower power usage by disabling warmers and tank heater during periods of inactivity.

LED Lighting is be ng specified where possible for product displays. LED lights use considerable less energy than fluorescent or incandescent lighting and have a longer l fe.

Corrugated, Biodegradable Materials are gradually replac ng Styrofoam pack ng.

HFC-free Foam Insulation (no hydro fluorocarbons) is now used exclusively to insulate Soft Heat® servers and the cabinets of liquid coffee and cold beverage dispensers.

GENERAL TERMS

Bypass (and variable bypass): A function, l ke dilution, that reduces strength of a concentrate but it is ntended for hot beverages. Generally, hot water is blended with coffee concentrate. Variable bypass allows different bypass rates for various brew volumes (small, med um and large) within a recipe.

Cold brew lock-out: A programm ng feature that prevents brewing when actual water temperature is below the Ready temperature.

Dilution: A function used to reduce strength of a concentrate for cold beverages. Generally cold tap water is blended with tea or coffee concentrate.

Drip Time: Sett ng of t me from the end of the spray head flow until the funnel flow stops (also applies to funnel lock).

Easy Pulse: This is a simplified version of Pulse Brew. It is programmed by selecting the time period of brew water dispense. Easy Pulse allows the operator to input a set time for which the brewer software will determine a pulse sequence.

Extraction: Water-soluble materials dissolve and move out of the coffee grounds and into the water. Part of the brewing process that includes Wetting and Hydrolysis.

Funnel lock: see Dr p T me.

Hydrolysis: A chemical reaction where the materials created dur ng extraction break down further nto water-soluble proteins and sugars. Part of the brewing process that ncludes Wetting and Extraction.

Pre-Infusion: A minor adjustment to a brew cycle when an nitial volume is dispensed, followed by a pause to allow for saturation of the material, then the rema nder of the brew cycle progresses. This is also descr bed as a "pre-soak."

Pulse Brew: A method used to increase the water contact t me dur ng a brew cycle. Pulse Brew can be programmed manually, by set t me or through BrewMETER adjustments. This method is very useful for smaller volumes.

Satellite Brewer: A system that includes a mother brewing system that remains in one location (e.g., kitchen) and dispenses into portable, or removable, servers for remote service.

Wetting: Grounds beg n to absorb hot water from the sprayhead and release gasses from the coffee. Part of the brewing process that includes Extraction and Hydrolysis.

EXCLUSIVE BUNN PROGRAMMING AND DESIGN FEATURES

BrewLOGIC®: A programming feature that compensates for flow rate variations to maintain consistent dispense levels when water quality is a consideration.

BrewMETER®: A programming feature that s mpl fies Pulse Brew and allows extraction man pulation with the touch of a button.

BrewWISE®: A programming feature with Radio Frequency Identification (RFID) communications between grinder, funnel and brewer for custom warmer and recipe management without error. Works n conjunction with SMART Hopper, SMART Funnel, and a Rec pe Writer/Card.

BrewWISE® Recipe Writer/Card: Creates rec pe cards or dedicated funnels for coffees, dramatically reducing equipment installation and cal bration time. A box connects to a W ndows® PC with a standard serial port and uses BUNN software to transfer information to the cards or a SMART Funnel, then to-and-from the BUNN BrewWISE brewer and grinder. Ensures consistently high quality coffee flavor at every location and can also make cards for advertising messages onto the brewer's display.

BrewWIZARD® – A programm ng feature that provides quick access to the most utilized setup parameters including a lock-out feature to prevent brewing when actual water temperature is below the Ready temperature. Features include: brew lock-out, brew ounces, enable ads, enter service number, and BrewMETER®.

BUNNLink®: An automated monitoring and communication system that detects pending service problems and forwards alerts for service.

Cool Froth®: Technology used in BUNN super automatic espresso systems that perfectly foams cold milk for great tasting iced beverages.

DBC®: Digital Brewer Control. BUNN was among the first in the dispensed beverage industry to introduce advanced beverage technology to the ndustry with Digital Brewer Control systems that allow users to precisely and consistently meet specific flavor profiles while also reducing training and labor costs.

Easy Pour®: An exclusive design used n decanters to assure convenient serving with a drip-proof, fast pouring lip from front or either side.

FlavorGard®: Technology that continuously monitors extract-to-water ratio and assures flavor consistency.

High Intensity®: Technology that mixes high viscosity concentrates throughly, consistently, and accurately to the required brix sett ng. The consistent results ensure the best quality beverage in the cup and contribute to maximum profits in the beverage program.

Infusion Series®: A product line of coffee/tea brewers that allow different brewing profiles from the same machine/footprint, saving valuable counter space.

Intellisteam®: Technology that allows the customer to see the milk frothing in the BUNN super automatic espresso systems with an integrated temperature sensor that simply cuts off steam through a wand when the mi k reaches the preset temperature, eliminating the need to manually use a thermometer.

RPM Feedback: Technology on auger motors n BUNN specialty drink systems that monitor the auger revolutions per minute (RPM) and controls powder dosing for each beverage, eliminating product waste and ensur ng consistency cup-to-cup.

Safety-Fresh®: A brew-through lid with a vapor seal to maintain freshness and a spill prevention design.

Smart Funnel®: A funnel designed with a microchip that can receive information from an enabled grinder and transfer that information to an enabled brewer, managing the grinding and brewing process from start to finish. A SMART Funnel can be programmed to accept dedicated recipe information, reducing labor costs and minimizing brewing errors. Used in conjunction with BrewWISE technology.

Smart Hopper®: A hopper designed with a microchip that communicates the type of coffee contained in the hopper to an enabled grinder, managing the grinding and brewing process from start to finish. Used in conjunction with BrewWISE technology.

SmartWAVE®: Turbulence is an important element in brew ng perfect coffee. SmartWAVE is a BUNN exclusive product design that uses technology to ncrease turbulence n the brew funnel, providing more contact between water and coffee and uniformity of extraction.

Soft Heat®: A docking server system with technology that thermostatically controls and automatically shuts off heat in the docking system once the preset temperature is reached and additionally monitors server volume. This is more beneficial than traditional warmer plates that heat continuously.

SplashGard®: An exclusive design with a shield next to the funnel handle that deflects hot liquids away from the user's hand.

ThermoFresh®: BUNN offers a full l ne of vacuum- nsulated servers and brewers that brew directly into these servers that keep coffee at optimal flavor for hours and save on energy consumption and by not requiring warming plates.

ABBREVIATION KEY FOR MODEL DESCRIPTIONS

1L/2U – 1 Lower, 2 Upper Warmers

2W1PH – 2 Wire 1 Phase

3L – 3 Lower Warmers

3W3PH – 3 Wire 3 Phase

6HL – 6 Hole

7HL – 7 Hole

"A" and "P"– used in conjunction with a product name indicate "Automatic" (water line required) or "Pourover" (no water line necessary, plug-in operation).

ADP – Adapter

AFI – Auto Fill Installed

APS – Airpot Server

ASSY – Assembly

AUX – Auxillary

BASE, BA – Base

BLK – Black Finish

BRKT – Bracket

BRW – BrewWise Recipe Writer

BW – BrewWise

CS – Case

CL – Cluster

CWV – Cold Water Valve

CONN – Connect

CTNR – Container

CONC – Concentrate

CVRSN – Conversion

DGTL – Digital

DBC– Digital Brewer Control

DT – Drip Tray

DV – Dual voltage

EXP – Export

FF – Fast Flow

FTG – Fitting

FLSH – Flashing Lamp

FR – Front

FNL KIT – Funnel Kit

FLK – Funnel Locks

FMD – Fresh mix dispenser

G – Gallon

GF – Gourmet Funnel

GRY – Gray

GP – Group

HDL – Handle

HIALT – High Altitude

HILM – High Lime

HL – Hole

HPR – Hopper

HWV – Hot Water Valve

INTFC – Interface

LAF – Liquid autofill

LTD SW – Lighted Switch

L – Liter

LEVR – Lever Action

LF – Lower Faucet

LP – Low profile

H&C – Hot and cold

MB – MultiBrewWISE

MECH – Mechanical

MHG – Multi hopper grinder

MNL – Manual

MP – Multi Phase

MTG – Mounting

NKL – Nickel

NO LITE – No Fresh Light

NO BASE – Without Base

NODTRAY – No Drip Tray

NO WRMR – No Warmer

ORN – Orange

PAF – Powder autofill

PC – Portion Control

PF – Plastic Funnel

PK – Pack

PKG – Package, Packaging

POSN – Position

PO – Pourover Feature

PR - Pourover

PWR CRD – Power Cord

QTEA FNL – Quick Tea Funnel

QK CONN – Quick Connect

RSD – Raised

RDY LT – Ready Light

REM – Removable

RSVR – Reservoir

RT – Right

SRVR – Server

SB – Shipboard

SIDEHNDL – Side Handle

SNGL – Single

SMT FNL – Smart Funnel

SMK FNL – Smoked Funnel

SH – Soft Heat

SPHD – Sprayhead

SF – Stainless Steel Funnel

SS – Self Serve

SST – Stainless Steel Finish

SWTNR – Sweetener

TC – Thermal Carafe

TS – Thermal Server

TF – Thermo Fresh

TRK – Trunk

WB – Wall Bracket

WD – Weight driven

WRMR – Warmer

WHT – White

WHT/SST – White/ Stainless

My Café® Pod Brewers

My Café AP

Commercial-grade, single-cup system with the convenience of automatic pod disposal

MY CAFÉ AP

- Pod bin and drip tray can be modified for under-counter disposal of pods.
- Brews up to 16 ounces in less than a minute; Integrated cup booster allows for 5" or 8" cup.
- Control extraction utilizing pulse brew technology with BrewMETER®.
- Hot water button provides up to 10 ounces for cappuccino, cocoa and soups.
- Energy Saver Mode.

MY CAFÉ

- Pod drawer works with tea and coffee pods, from 45 to 61 mm.
- Fast brew coffee in about 30 seconds; brew tea in less than one minute with button that provides steeping action.
- Brew 4 to 12 ounces (118 - 355 mL) to preferred strength by adjusting the portion/volume control.
- Easy to use and maintain with a removable water reservoir, a drawer-style pod holder *(2 included)* and dishwasher safe components.

My Café Automatic

My Café Pourover

Brew Station and 1 Rack Assembly

Rack Assembly

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Dimension	Weight	Cord Attached	Agencies
My Café AP	42300.0000	120	11.9	1425	60-8 oz. cups 60-(237 mL)	15.8" H x 9.7"W x 16.4" D (40.1cm H x 24.6cm W x 41.7cm D)	30 lbs. (13.6 kg.)	Yes	ETL, NSF
MCP *(Pourover)*	35400.0003	120	12	1440	60-8 oz. cups 60-(237 mL)	12.5" H x 8"W x 10.5" D (31.7cm H x 20.3cm W x 26.7cm D)	9.75 lbs. (4.4 kg.)	Yes	cULus LISTED, NSF
	35400.0004 *(high altitude)*								
MCA *(Automatic)*	35400.0009					13.6" H x 8"W x 10.5" D (34.5cm H x 20.3cm W x 26.7cm D)	11.35 lbs. (5.1 kg.)		
	35400.0010 *(high altitude)*								
Brew Station *(with Standard Header)*	39501.0001					20" H x 26.2"W x 16" D (50.8cm H x 66.5cm W x 40.6cm D) *height dimension with graphic header*	26 lbs. (11.8 kg)		
Rack Assembly	39502.0001					16" H x 9.5"W x 16" D (40.6cm H x 24.1cm W x 40.6cm D)	8 lbs. (3.6 kg)		

trifecta™ Single Cup Air Infusion™ Brewer

trifecta

Tech-enabled, barista-crafted single cup brewer that heightens the quality of coffee and tea

Every coffee has a voice. With the trifecta, the barista creates an experience which unlocks the nuances of that coffee. Using an air infusion single cup process, the trifecta brews so that each coffee's unique voice resonates.

trifecta BREWING PHASES

1. *Wetting:* The saturation of the coffee grounds can be controlled to get the percentage of water and pause appropriate for that coffee.
2. *Extraction:* Air is injected into a pressurized chamber so that the grounds are agitated -- the result: uniformity of extraction and a complex beverage that will be enjoyed by a coffee lover.
3. *Hydrolysis:* Air presses the beverage through a metal screen that filters out coffee grounds while preserving coffee oils and aromatics for a deep-bodied, unique coffee experience.

See trifecta grinder on page 40.

Visit www.trifectaexperience.com for more information.

4

NOTE: Catalog icon legend can be found on page 1.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Dimension	Weight	Cord Attached	Agencies
trifecta	41200.0000	120	11.45	13.75	cups	26.73"H x 11.89"W x 11.87"D (60.3cm H x 30.2cm W x 30.1cm D)	41.7 lbs. (13.4 kg)	Yes	

Pourover Coffee Brewers

VPR

An integral part of any office coffee service program

- Requires no plumbing – completely portable. Just pour cold water in top and coffee brews immediately.
- Automatic models are connected to waterline.

A10 MODEL

- Uses 50 oz.. decanter.
- Use BUNN paper filters - Product No. 20106.0000.

VP17

- One or two warmers.
- Use BUNN paper filters - Product No. 20115.0000.

VPR MODEL

- Two separately controlled warmers.
- Use BUNN paper filters - Product No. 20115.0000.

Decanters sold separately, see page 68.

A10

VP17-2

VP17-2 SS

VP17-1

Model	Product #	Dimension	Weight	Finishes	Volts	Amps	Watts	Brewing Capacity	Cord Attached	Agencies
VP17-1 SS	13300.0001	17.8" H x 8" W x 17.7" D (45.2cm H x 21.6cm W x 44.96cm D)	23 lbs. (10.5 kg)	Stainless	120	13.3	1600	3.9 gal. (14.6 L)	Yes	UL LISTED, NSF
VP17-1 BLK	13300.0011		21 lbs. (9.6 kg)	Black						
A10 ***(pourover)***	21250.0000 *(inc. glass decanter)*	14.7" H x 6.7" W x 12.9" D (37.3cm H x 17.0cm W x 32.8cm D)	14 lbs. (6.4 kg)			9.5	1140	2.9 gal. (11 L)		
VP17-2 SS	13300.0002	18.9" H x 8.5" W x 17.8" D (48cm H x 21.6cm W x 45.2cm D)	24 lbs. (10.9 kg)	Stainless		13.3	1600	3.9 gal. (14.6 L)		
VP17-2 BLK	13300.0012		23 lbs. (10.5 kg)	Black						
VPR-Black	33200.0000	20.7" H x 16.2" W x 8" D (52.6cm H x 41.15cm W x 20.3cm D)				13.1	1575	3.9 gal. (14.6 L)		
	33200.0015 *(inc. 2 glass decanters)*		24 lbs. (10.9 kg)							
	33200.0002 *(inc. 2 Easy Pour decanters)*									

Pourover Coffee Brewers

(VP17-3 only)

VP17-3

An integral part of any office coffee service program

- Requires no plumbing – completely portable. Just pour cold water in top and coffee brews immediately.
- Three separately controlled warmers.
- Use BUNN paper filters - Product No. 20115.0000.

Decanters sold separately, see page 68.

VP17-3

VPS

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Capacity	Cord Attached	Agencies
VPS-Black	04275.0031	19.8" H x 23.5" W x 8" D (50.1cm H x 59.7cm W x 20.3 cm D)	26 lbs. (11.8 kg)	120	13.8	1660	3.9 gal. (14.6 L)	Yes	UL LISTED NSF
VP17-3 SS *(3 lower)*	13300.0003	17.8" H x 16.4" W x 17.7" D (45.2cm H x 41.7cm W x 45cm D)	29 lbs. (13.2 kg)		13.3	1600			
VP17-3 BLK *(3 lower)*	13300.0013		32 lbs. (14.5 kg)						
VP17-3 SS *(2 upper)*	13300.0004	18.9" H x 8.5" W x 17.7" D (48cm H x 21.6cm W x 45cm D)	25 lbs. (11.4 kg)						

Pourover Coffee Brewers

VPR-TC

An integral part of any office coffee service program

VPR-APS

- Brews 3.8 gallons (14.4 litres) of perfect coffee per hour.
- Pourover brewer requires no plumbing – completely portable. Just pour cold water in and coffee brews immediately.
- Accommodates 1.9 to 3 litre airpots.
- Convenient airpot keeps coffee hot and for hours.
- Airpots are easily transported to remote meeting rooms, breakfast bars, etc.

VPR-TC

- Brews 3.8 gallons (14.4 litres) of perfect coffee per hour.
- Pourover brewer requires no plumbing – completely portable. Just pour cold water in and coffee brews immediately.
- Accommodates thermal carafe up to 8 5" (21.6 cm) tall.

Servers sold separately, see pages 23 and 24.

VPR-APS

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Capacity	Funnel Type	Cord Attached	Agencies
VPR-APS	33200.0010	26.6" H x 15.9" W x 8" D (67.6cm H x 40.4cm W x 20.3cm D)	23 lbs. (10.4 kg)	120	11.5	1375	3.8 gal. (14.4 L)	Black Plastic	Yes	UL LISTED NSF
VPR-APS *(2.2L airpot included)*	33200.0014									
VPR-TC	33200.0011	21.3" H x 15.9" W x 8" D (54.1cm H x 40.4cm W x 20.3cm D)	23 lbs. (10.4 kg)							

Pourover Airpot and Thermal Server Coffee Brewers

CW15 - APS

Brew directly into portable, vacuum-insulated servers that keep coffee at optimal flavor for hours

CW15-APS

- Brews directly into 1.9 to 2.5 litre airpots.
- Easily transported to remote meeting rooms, breakfast bars, etc.
- Digital timer enables users to make brew cycle adjustments from the front panel.
- Use BUNN paper filters - Product No. 20115.0000.

CW15-TS

- Easily transported to remote meeting rooms, breakfast bars, etc.
- Server accommodates up to 4" (10.16 cm) cup.
- Use BUNN paper filters - Product No. 20115.0000.

CW15-TC

- Brews 3.8 gallons (14.4 litres) per hour.
- Accepts thermal carafe up to 8.5" tall (21.6cm).
- Use in quick turn environment where high quality coffee is continuously refreshed.
- Models are space saving 9" wide (22.9cm).

Servers sold separately, see pages 23 and 24.

CW15 - TS

CW15-TC

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Capacity	Funnel Type	Cord Attached	Agencies
CW15-TS	23000.0000	27.6" H x 9" W x 18.5" D (70.1cm H x 22.9cm W x 47cm D)	27 lbs. (12.3 kg)	120	11.4	1370	3.9 gal. (14.6 L)	Black Plastic	Yes	UL LISTED NSF
CW15-APS	23001.0000	23.6" H x 9" W x 18.5" D (59.9cm H x 22.9cm W x 47cm D)	28 lbs. (12.7 kg)					Black Plastic		
	23001.0062							Gourmet Funnel		
CW15-TC	23001.0040	17.9" H x 9" W x 18.5" D (45.5cm H x 22.9cm W x 55.4cm D)	28 lbs. (12.7 kg)					Black Plastic		

AXIOM® Coffee Brewers

AXIOM-DV-3

Medium volume brewing solution featuring Digital Brewer Control, precise extraction control and a variety of portable servers

- Large 200 oz.. (5.9 litres) tank provides back-to-back brewing capacity.
- Dual voltage available on some models. Can operate at 120V/15 amp or 120/208-240V/20 amp.
- BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels even in high lime areas.
- BrewWIZARD® technology simplifies brewer programming.
- Digital temperature control and accuracy.
- Electronic diagnostics and built in tank drain make service easier.
- Automatic warmer shut-off.
- Energy Saver Mode.
- Use BUNN paper filters – Product No. 20115.0000.

Decanters sold separately, see page 68.

NOTE: Catalog icon legend can be found on page 1.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
AXIOM-15-3	38700.0000	120	15	1800	4.2 gal. (15.9 L/hr)	Plastic	18.9"H x 8.5"W x 17.7"D (49cm H x 21.6cm W x 44.9cm D)	30 lbs. (13.6 kg)	Yes	UL LISTED, NSF
AXIOM-35-3	38700.0001	120/240	17.5	3850	7.5 gal. (28.4 L/hr)				No	
AXIOM-DV-3	38700.0008	120	15	1800	4.2 gal. (15.9 L)				Yes	
		120/208	15.5	2980	7.5 gal. (28.4 L)					
		120/240	17.5	3850						

AXIOM® Coffee Brewers

AXIOM-15-3

Medium volume brewing solution featuring Digital Brewer Control, precise extraction control and a variety of portable servers

- Large 200 oz.. (5.9 litres) tank provides back-to-back brewing capacity.
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD® technology simplifies brewer programming.
- Electronic diagnostics and built in tank drain make service easier.
- Automatic warmer shut-off.
- Energy Saver Mode.
- Hot water faucet.
- Dual voltage available. Can operate at 120V/15 amp or 120/208-240V/20 amp.
- Use BUNN paper filters – Product No. 20115.0000.

Decanters sold separately, see page 68.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
AXIOM-15-3	38700.0002	120	15	1800	4.2 gal. (15.9 L/hr)	Plastic	16.8"H x 16.5"W x 17.7"D (42.7cm H x 41.9cm W x 45cm D)	31 lbs. (14.1 kg)	Yes	UL LISTED NSF
AXIOM-35-3	38700.0003	120/240	17.5	3850	7.5 gal. (28.4 L)				No	
AXIOM-DV-3	38700.0009	120	15	1800	4.2 gal. (15.9 L)		18.9"H x 8.5"W x 17.7"D (48cm H x 21.6cm W x 44.9cm D)	32 lbs. (14.5 kg)	Yes	
		120/208	15.5	2980	7.5 gal. (28.4 L)					
		120/240	17.5	3850						

Decanter Coffee Brewers

(CWTF only)

CWTF

Medium volume brewing solution with simple switch controls and a variety of portable servers

- CWTF models feature hot water faucet and pourover backup on all models.
- Use BUNN paper filters – Product No. 20115.0000.

Decanters sold separately, see page 68.

CWTF

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
CWTF15	12950.0211 *(1U, 1L)*	120	13	1570	3.9 gal. (14.6 L)	Plastic	18.9"H x 8.5"W x 17.8"D (48cm H x 21.6cm W x 45.2cm D)	32.5 lbs. (14.5 kg)	Yes	UL LISTED, NSF
CWT15 *(no faucet)*	12950.0356 *(2U, 1L)*		13.9	1670		Stainless		30 lbs. (13.6 kg)		
CWT20 *(no faucet)*	12950.0291 *(2U, 1L)*		17.9	2150	5.3 gal. (19.9 L)				No	
CWT35 *(no faucet)*	12950.0292 *(2U, 1L)*	120/208-240	17.1	3850	7.5 gal. (28.4 L)					
CWTF15-3	12950.0213 *(2U, 1L)*	120	13.9	1670	3.9 gal. (14.6 L)	Plastic		33 lbs. (14.97 kg)	Yes	
	12950.0217 *(2U, 1L)*					Stainless		34 lbs. (15.4 kg)		
CWTF20-3	12950.0283 *(2U, 1L)*		17.9	2150	5.3 gal. (19.9 L)			31 lbs. (14.1 kg)	No	
CWTF35-3	12950.0253 *(2U, 1L)*	120/240	17.1	3850	7.5 gal. (28.4 L)	Plastic		30 lbs. (13.6 kg)		
	12950.0261 *(2U, 1L)*					Stainless		32 lbs. (14.5 kg)		
CWTF-DV	12950.0410 *(2U, 1L)*	120	13.9	1670	3.9 gal. (14.6 L)			35 lbs. (15.9 kg)		
		120/208	13.9	2640	6.7 gal. (25.3 L)					
		120/240	15.6	3400	7.5 gal. (28.4 L)					

Decanter Coffee Brewers

(CWTF only)

CWTF

Medium volume brewing solution with simple switch controls and a variety of portable servers

- CWTF models feature pourover backup on all models.
- Use BUNN paper filters – Product No. 20115.0000.
- Low profile for under cabinet placement.

A10 MODEL

- Uses 50 oz. decanter.
- Use BUNN paper filters - Product No. 20106.0000.

Decanters sold separately, see page 68.

A10

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
CWTF15	12950.0293 *(1L)*	120	12.3	1470	3.9 gal. (14.6 L)	Plastic	16.8"H x 8.5"W x 17.8"D (42.7cm H x 21.6cm W x 45.2cm D)	27 lbs. (12.2 kg)	Yes	
CWTF15 *(left warmers)*	12950.0298 *(3L)*		13.9	1670			17"H x 16.5"W x 17.7"D (43.2cm H x 41.9cm W x 45.2cm D)	35 lbs. (15.9 kg)		
CWTF35	12950.0381 *(3L)*	120/208-240	17.1	3850	7.5 gal. (28.4 L)	Stainless		39 lbs. (17.7 kg)	No	
CWT15-3 *(no faucet)*	12950.0112 *(3L)*	120	13.9	1670	3.9 gal. (14.6 L)	Plastic		32 lbs. (14.5 kg)	Yes	UL LISTED NSF
CWTF15-3	12950.0212 *(3L)*							35 lbs. (15.9 kg)		
	12950.0216 *(3L)*					Stainless		36 lbs. (16.4 kg)		
CWTF20-3	12950.0232 *(3L)*		17.9	2150	5.3 gal. (19.9 L)	Plastic		35 lbs. (15.9 kg)	No	
CWTF35-3	12950.0252 *(3L)*	120/240	16	3850	7.5 gal. (28.4 L)					
CWTF-DV	12950.0409 *(3L)*	120	13.9	1670	3.9 gal. (14.6 L)	Stainless		39 lbs. (17.7 kg)		
		120/208		2640	6.7 gal. (25.3 L)					
		120/240	15.6	2400	7.5 gal. (28.4 L)					
A10A *(pourover)*	21250.0004 *(inc. glass decanter)*	120	9.5	1140	2.9 gal. (11 L)	Black	14.7" H x 6.7"W x 12.9" D (37.3cm H x 17.0cm W x 32.8cm D)	16 lbs. (7.3 kg)	Yes	

Decanter and AXIOM® Coffee Brewers

(CWTF only)

AXIOM Twin

CWTF

- Medium volume, twin brew head systems.
- Four or six individually controlled warming stations.
- Pourover feature on both sides.
- Use BUNN paper filters - Product No. 20115.0000.

AXIOM

- Twin brew head systems.
- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Six individually controlled warmers.
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD® technology simplifies brewer programming.
- Electronic diagnostics and built-in tank drain make service easier.
- Use BUNN paper filters – Product No. 20115.0000.

Decanters sold separately, see page 68.

AXIOM Twin

CWTF Twin

CWTF Twin

Model	Product #	Volts	Amps	Watts	Legs	Brewing Capacity	Dimension	Weight	Cord Attached	Agencies
CWTF 2/2 Twin	23400.0001	120/240	27.7	6650		15 gal. (56.8 L/hr)	19.3"H x 16.5"W x 19.8"D (49cm H x 41.9cm W x 50.3cm D)	56 lbs. (25.4 kg)	No	UL LISTED NSF
CWTF 4/2 Twin	23400.0011		28.5	6850						
CWTF 0/6 Twin	23400.0020		28.5	6850	4" satin nickel legs		20.54" H x 30.75" W x 20.64" D (52.17cm H x 78.11cm W x 50.43cm D)	74 lbs. (33.6 kg)		
AXIOM 4/2 Twin	38700.0014	120/208-240	27.9	6700			19.1"H x 16.4"W x 17.7"D (48.5cm H x 41.7cm W x 44.9cm D)	61 lbs. (27.7 kg)		
AXIOM 0/6 Twin	38700.0015				4" black legs		20.5" H x 30.3" W x 17.7" D (52.1cm H x 77cm W x 45cm D)	74 lbs. (33.6 kg)		

Automatic Brewers

OL

OT/OL

- Two separately controlled warmers.
- Designed to function well in low or uneven water pressure situation. *(OL models)*
- OL models can also be operated as a pourover unit.
- Faucet kit available.
- Use BUNN paper filters - Product No. 20115.0000.

VLPF

- Two individually controlled warmers.
- Use BUNN paper filters - Product No. 20115.0000.

Decanters sold separately, see page 68.

OT

VLPF

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Dimension	Weight	Cord Attached	Agencies
OL 20	20820.0001	120	17	2050	6 gal. (22.7 L)	23.5" H x 12" W x 18.5" D (59.7cm H x 30.5cm W x 47cm D)	34 lbs. (15.5 kg)	No	UL LISTED NSF
OL 35	20820.0002	120/240	15.6	3750	7.5 gal. (28.4 L)				
OT 15	20830.0000	120	13	1570	4.2 gal. (15.7 L)	22.4" H x 12" W x 18.3" D (56.9cm H x 30.5cm W x 46.5cm D)	32.7 lbs. (14.8 kg)	Yes	
OT 20	20830.0001		17.4	2090	5.3 gal. (19.9 L)		32.3 lbs. (14.7 kg)	No	
VLPF	07400.0005	120	13.3	1600	3.9 gal. (14.6 L)	17.4" H x 23.5" W x 13.1" D (44.2cm H x 59.7cm W x 33.3cm D)	26.3 lbs. (11.9 kg)	Yes	

Decanter Coffee Brewers

(RL only)

RT

- Five separately controlled warmers.
- All stainless steel construction.
- Models available with faucet. Faucet kits available for existing models.
- Designed to function well in low water pressure situations, the RL model can also be operated as a pourover unit.
- CRTF model has hot water faucet and pourover feature.
- Use BUNN paper filters - Product No. 20115.0000.

Decanters sold separately, see page 68.

RL

CRTF

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Funnel Type	Brewing Capacity	Cord Attached	Agencies
CRTF5-35	13250.0023	17.1" H x 24.5" W x 18.2" D (43.4cm H x 62.2cm W x 46.2cm D)	50.2 lbs. (22.8 kg)	120/240	16.9	4050	Plastic	7.5 gal. (28.4 L)	No	UL LISTED NSF
CRTF5-35	13250.0025		48 lbs. (21.8 kg)				Stainless			
RT	20835.0000	21.2" H x 24" W x 18.5" D (53.8cm H x 61cm W x 47cm D)	42 lbs. (19.1 kg)							
RTF *(w/faucet)*	20835.0004		46 lbs. (20.9 kg)							
RL	20825.0000	23.5" H x 24" W x 18.5" D (59.7cm H x 61cm W x 47cm D)	44 lbs. (20.0 kg)							

Coffee Urns

SRU

Automatic drip brewing of delicious coffee every time

3 GALLON URN

- Large water tank holds over 10 gallons.
- Draw off hot water during brewing cycle without affecting delivery of coffee.
- Brews full or half batches.
- Top mounted components ease service.
- Use BUNN paper filters - Product No. 20109.0000.

TWIN 3 GALLON URN

- Unique design assures extremely low evaporation loss to maintain the brew at its flavorful peak.
- Large water tank holds over 20 gallons.
- Use BUNN paper filters - Product No. 20109.0000.

U3

Model	Product #	Volts	Amps	Watts	Capacity	Dimension	Weight	Cord Attached	Agencies
SRU	06325.0001	120/208	19.4	4025	11.4 gal. (43.4 L)	33.5" H x 14" W x 24.6" D (85.1cm H x 35.6cm W x 62.5cm D)	73 lbs. (33.1 kg)	No	UL LISTED NSF
	06325.0002	120/240	16.8				75 lbs. (34.0 kg)		
U3 *(Single Serve)*	20500.0000	120/208	28	5825	16.3 gal. (61.7 L)	32.4" H x 34.5" W x 21" D (82.3cm H x 87.6cm W x 53.3cm D)	103 lbs. (46.8 kg)		
	20500.0001	120/240		6725	18.8 gal. (71.2 L)				

Infusion Series® Coffee Brewers

ICB-DV

ICB-Twin

Space-saving brewer yields a variety of flavor profiles with Digital Brewer Control and precise extraction control

- Three brew buttons allow for 3 separate brewing profiles. Two programmable batch switches for full and half batches.
- Brews into 2.5 to 3.8 litre airpots and 1 and 1.5 gallon (3.8 and 5.7 L) baseless ThermoFresh® servers.
- Large sprayhead and BrewWISE® intelligence.
- Energy Saver Mode.
- Alphanumeric display communicates in English and Spanish. Display capable of showing English or metric measurements.
- Compatible with BUNNlink®.

ICB-DV

- Brews 5.1 to 11.9 gallons (19.3 to 45 litres) of perfect coffee per hour.
- Large 3-gallon (11.36 litre) tank provides back-to-back brewing capacity at 208-240V applications.
- Dual voltage adaptable. Can operate at 120V/15amp or 208-240V/20amp.
- Includes overlay kits for customization of brewer interface.

ICB-TWIN

- Brews up to 18.9 gallons (71.5 litres) of perfect coffee per hour.
- Large 5.6 gallon (21.2 litre) tank provides back-to-back brewing capacity.

Servers sold separately, see pages 23-24, 27, and 28.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
ICB-DV	36600.0000	120	14	1700	5.1 gal. (19.3 L)	Smart Funnel	26.01"H x 10.19"W x 22.42" D (66.1cm H x 25.9cm W x 57cm D)	47.5 lbs. (21.5 kg)	Yes	UL LISTED NSF
		120/208	13.8	2900	8.9 gal. (33.7 L)					
		120/240	16.8	4050	11.9 gal. (45 L)					
ICB-DV *(Black)*	36600.0004	Same as 36600.0000								
ICB Twin	37600.0000	120/240	25	6000	18.9 gal. (71.5 L)		26.2"H x 20.0"W x 22.4"D (66.5cm H x 50.8cm W x 56.9cm D)	77 lbs. (34.9 kg)		
	37600.0002	120/208	28							
ICB Twin *(Black)*	37600.0004	120/240	25							

Infusion Series® Coffee Brewers Tall

ICB-DV Tall

ICB-Twin Tall

Space-saving brewer yields a variety of flavor profiles with Digital Brewer Control and precise extraction control

- Designed to brew into 1 gallon and 1.5 gallon (3.8 and 5.7 litre) ThermoFresh® servers with base for easy transport of coffee to other locations.
- Easy Pulse interface allows automatic programming of pulse routine.
- BrewWISE® intelligence.
- Energy Saver Mode.
- Digital display in English/Spanish for easier programming and control. Advertising messages and machine status also displayed. Display capable of showing English or Metric measurements.
- Compatible with BUNNlink®.

ICB-DV TALL

- Brews 5.1 to 11.9 gallons (19.3 to 45 litres) of perfect coffee per hour.
- Large 3-gallon (11.36 litre) tank provides back-to-back brewing capacity at 208-240V applications.
- Dual voltage adaptable. Can operate at 120V/15amp or 208-240V/20amp.
- Includes overlay kits for customization of brewer interface.

ICB-TWIN TALL

- Brews up to 18.9 gallons (71 5 litres) of perfect coffee per hour.
- Large 5.6 gallon (21 2 litre) tank provides back-to-back brewing capacity

Servers sold separately, see pages 27-28.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
ICB-DV Tall	36600.0005	120	14	1700	5.1 gal. (19.3 L)	Smart Funnel	34.4"H x 10.1"W x 19.9"D (87.4cm H x 25.7cm W x 50.5cm D)	51 lbs. (23.1 kg)	Yes	UL LISTED NSF
		120/208	13.8	2900	8.9 gal. (33.7 L)					
		120/240	16.8	4050	11.9 gal. (45 L)					
ICB Twin Tall	37600.0005		25	6000	18.9 gal. (71.5 L)		34.4"H x 22.6"W x 20.1"D (87.4cm H x 57.4cm W x 51.1cm D)	85.5 lbs. (38.8 kg)		

AXIOM® Airpot Brewers

(Single airpot brewers only)

AXIOM Twin APS

Medium volume brewing solution featuring Digital Brewer Control, precise extraction control and a variety of portable servers

- BrewWIZARD® technology simplifies brewer programming.
- Brews directly into 1.9 to 3 liter airpots.
- Convenient airpots keep coffee hot for hours.
- Electronic diagnostics and built in tank drain for ease of service.
- Hot water faucet.
- Energy Saver Mode.

AXIOM-DV-APS

- Easily convertible by flipping a switch to:
  - 120 volt, 12.5 amp
  - 120/208 volt, 13 amp
  - 120/240 volt, 15 amp
- Brews 4.2 to 7.5 gallons (15.7 to 28.4 litres) of perfect coffee per hour.

AXIOM-TWIN-APS

- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Twin brew head system.

Airpots sold separately, see page 23.

AXIOM-DV-APS

NOTE: Catalog icon legend can be found on page 1.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
AXIOM-DV-APS	38700.0010	120	12.5	1500	4.2 gal. (15.9 L)	Plastic Funnel	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D	36 lbs. (16.3 kg)	Yes	UL LISTED NSF
		120/208	13	2680	7.5 gal. (28.4 L)					
		120/240	15	3550	7.5 gal. (28.4 L)					
AXIOM Twin APS	38700.0013	120/240	26	6100	15 gal. (56.8 L)	Stainless	23.5"H x 16"W x 17.7"D (59.7cm H x 40.6cm W x 44.9cm D	64 lbs. (29 kg)		

SmartWAVE® Airpot Brewers

WAVE 15-APS

WAVE 15-S-APS (Silver)

legs extended to accommodate 2.5L push-button airpot

Low profile brewer featuring SmartWAVE technology, Digital Brewer Control, and flexible server options

- Brews 3.9 gallons (14.8 litres) of perfect coffee per hour.
- Brew into 1.9L thermal carafe brewer utilizing the slide-out booster tray.
- Adjustable legs to accommodate up to 3.0L lever action and 2.5L push button BUNN airpots *(refer to usage table)*.
- SmartWAVE® technology increases turbulence in the brew funnel.
- Convenient airpots keep coffee hot and fresh for hours and are easily transported to remote serving areas.
- Hot water faucet.
- Energy Saver Mode.

STANDARD MODEL

- Four-digit LED read-out for simple programming.
- Utilize the same LED read-out for brewer status *(Ready, Heating, Brewing)*.
- 13 pulse brew routine selections adjust strength profile in conjunction with the BrewMETER®.
- Large funnel to accommodate a wide range of coffees and a 17-hole sprayhead to maximize turbulence and wetting.

SILVER MODEL

- Analog switches accompanied by red/green LED for programming.
- Red/green LED provide brewer status *(Ready, Heating, Brewing)*.
- Choice of three pulse brew routines to adjust your flavor profile.

Airpots and thermal carafes sold separately, see page 23.

Airpot/Carafe/Pitcher Usage Table				
Brewer Position	BUNN Part #	Description	Brewer Height	Approx. Adjustment
Utilizing thermal carafe tray	36029.0001	1.9L deluxe thermal carafe	16.9"	N/A
Utilizing thermal carafe tray	40163.0000	1.9L economy thermal carafe	16.9"	N/A
LP feature *(lowest)*	39430.0000	1.9L thermal pitcher	16.9"	N/A
LP feature *(lowest)*	32125.0000	2.5L lever-action airpot	16.9"	N/A
Extend legs	32130.0000	3.0L lever-action airpot	17.5"	.6"
Extend legs	28696.0002	2.2L push-button airpot	18"	1"
Extend legs	13041.0001	2.5L push-button airpot	18.5"	1.5"
Extend legs	23300.0010	2.5L thermal server	18.5"	1.5"

Model	Product #	Dimension	Weight	Funnel Type	Volts	Amps	Watts	Brewing Capacity	Cord Attached	Agencies
WAVE 15-APS	39900.0005	16.9"H x 8.7"W x 17.1"D (43cm H x 22.2cm W x 43.5cm D	24.2 lbs. (11 kg)	Black Plastic	120	11.3	1350	3.9 gal. (14.8 L)	Yes	c UL us LISTED, NSF
WAVE 15-APS *(Specialty)*	39900.0012			Gourmet						
WAVE 15-S-APS	39900.0006			Black Plastic						
WAVE-APS	39900.0008				120/240	9.4	2250	6.4 gal (24.2 L)	No	
WAVE-S-APS	39900.0009									

Airpot Brewers

(Single airpot brewers only)

CWTF Twin APS

Low profile brewer with simple switch controls and flexible server options

- Brews directly into 1.9 to 3 litre airpots.
- Hot water faucet with pourover feature.
- Use BUNN paper filters - Product No. 20115.0000. Gourmet funnel requires BUNN paper filter 20100.0000.

CWTF-DV

- Voltage converts easily by flipping a switch.

Airpots sold separately, see page 23.

CWTF APS-DV

CWTF APS

Model	Product #	Funnel Type	Volts	Amps	Watts	Brewing Capacity	Dimension	Weight	Cord Attached	Agencies
CWTF APS-DV	23001.0058	Black Plastic	120	11.4	1370	3.9 gal. (14.6 L)	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D)	36 lbs. (16.3 kg)	No	
			120/208		2340	6.7 gal. (25.3 L)				
			120/240	13.1	3100	7.5 gal. (28.4 L)				
	23001.0059	Black Plastic and Stainless Steel	120	11.4	1370	3.9 gal. (14.6 L)		37 lbs. (16.7 kg)		
			120/208		2340	6.7 gal. (25.3 L)				
			120/240	13.1	3100	7.5 gal. (28.4 L)				
CW15-APS *(no faucet)*	23001.0000 Pourover	Black Plastic	120	11.4	1370	3.8 gal. (14.4 L)	23.6"H x 9"W x 18.5"D (59.9cm H x 22.9cm W x 47cm D)	28 lbs. (12.7 kg)	Yes	UL LISTED NSF
	23001.0062 Pourover	Gourmet Funnel								
	23001.0003	Black Plastic						29 lbs. (13.2 kg)		
CWTF15-APS	23001.0017	Stainless Steel						38 lbs. (17.3 kg)		
	23001.0006	Black Plastic						33 lbs. (15.0 kg)		
	23001.0051	Gourmet Funnel						37 lbs. (16.8 kg)		
CWTF20-APS	23001.0007	Black Plastic		15.4	1850	5.1 gal. (19.3 L)		32 lbs. (14.6 kg)	No	
CWTF35-APS	23001.0008		120/ 208-240	15	3550	7.5 gal. (28.4 L)		33 lbs. (15.0 kg)		
	23001.0052	Gourmet Funnel		15				37 lbs. (16.8 kg)		
CWTF35-APS, SF	23001.0023	Stainless Steel								
CWTF Twin APS	23400.0041		120/240	26	6250	15 gal. (56.8 L)	23.5"H x 16"W x 19.7"D (59.7cm H x 40.6cm W x 50.0cm D)	60 lbs. (27.3 kg)		
	23400.0046	Gourmet Funnel								

Thermal Carafe Coffee Brewers *(CWTF-TC only)*

CWTF Twin-TC

AXIOM-DV-TC

- Easily convertible by flipping a switch to:
  - 120 volt, 12.5 amp
  - 120/208 volt, 13 amp
  - 120/240 volt, 15 amp
- Brews 4.2 to 7 5 gallons (15.7 to 28.4 litres) of perfect coffee per hour.
- BrewWIZARD® technology simplifies brewer programming.

CWTF-TC

- Accepts thermal carafe up to 8.5" tall (21.6cm).
- Use in quick-turn environment where high quality coffee is continuously refreshed.

CWTF TWIN-TC BREWER

- Accepts thermal carafe up to 8.5" (21.6 cm) tall.
- Use in quick-turn environment where high quality coffee is continuously refreshed.
- Pourover feature.

Thermal carafes sold separately, see page 23.

CWTF15-TC

AXIOM-DV-TC

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
AXIOM-DV-TC	38700.0011	120	12.5	1500	4.2 gal. (15.9 L)	Black Plastic	17.9" H x 9"W x 18.5" D (45.5cm H x 22.9cm W x 55.4cm D)	30 lbs. (13.6 kg)	Yes	UL LISTED, NSF
		120/208	13	2680	7.5 gal. (28.4 L)					
		120/240	15	3550	7.5 gal. (28.4 L)					
CW15-TC *(no faucet)*	23001.0040 *Pourover*	120	11.4	1370	3.9 gal. (14.6 L)			28 lbs. (12.7 kg)		
CWTF15-TC	12950.0360							32 lbs. (14.5 kg)		
CWTF20-TC	12950.0380	120	15.4	1850	5.3 gal. (19.9 L)			31 lbs. (14.1 kg)	No	
CWTF35-TC	12950.0379	120/ 208-240	15	3550	7.5 gal. (28.4 L)			32 lbs. (14.5 kg)		
CWTF Twin-TC	23400.0047	120/240	26	6250	15 gal. (56.8 L)	SST	17.2" H x 16"W x 22.5" D (43.7cm H x 41cm W x 57.2cm D)	64 lbs. (29.3 kg)		
CWTF-TC DV	23001.0069	120	11.4	1370	3.9 gal. (14.6 L)	Black Plastic	17.9" H x 9"W x 18.5" D (45.5cm H x 22.9cm W x 55.4cm D)	29 lbs. (13.2 kg)		
		120/208	11.4	2340	6.7 gal. (25.3 L)					
		120/240	13.1	3100	7.5 gal. (28.4 L)					

Airpots and Thermal Carafes

Push-Button Airpot

Lever-Action Airpot

Vacuum Pitcher

Thermal Carafe

Economy Thermal Carafe

Brew-through pump or lids allows direct brewing

PUSH-BUTTON AIRPOT

- Glass insulation.

LEVER-ACTION AIRPOT

- Stainless steel lining.

THERMAL CARAFE

- Holds 1.9 litres or 64 ounces.
- Unbreakable stainless steel interior and exterior.
- Superior vacuum insulation.
- Fits on BUNN Thermal Carafe and Twin Thermal Carafe brewers.

See page 69 for universal airpot racks and coffee-isers.

Model	Product #	Liner	Quantity	Capacity	Dimension	Weight	Agencies
2.2 litre Push-Button Airpot	28696.0002	Glass	single unit	2.2 litres (74 oz.)	16.4" H x 6.1" W x 7.9" D (42cm H x 16cm W x 20cm D)	4.5 lbs. (2.04 kg)	ETL
	28696.0000		6 units/ case			24 lbs. (10.9 kg)	
2.5 litre Push-Button Airpot	13041.0001		single unit	2.5 litres (84 oz.)	14.6" H x 6.3" W x 9" D (37cm H x 16cm W x 23cm D)	5 lbs. (2.3 kg)	
	13041.0101		6 units/ case			25 lbs. (11.3 kg)	
2.5 litre Lever-Action Airpot	32125.0000	Stainless Steel	single unit			5.3 lbs. (2.4 kg)	
	32125.0100		6 units/ case			32 lbs. (14.6 kg)	
3.0 litre Lever-Action Airpot	32130.0000		single unit	3.0 litres (102 oz.)	15.5" H x 6.3" W x 9"D (39.4cm H x 16cm W x 23cm D)	5.8 lbs. (2.6 kg)	
	32130.0100		6 units/ case			35 lbs. (15.9 kg)	
3.8 litre Lever-Action Airpot	36725.0000		single unit	3.8 litres (128 oz.)	(17.6" H x 6.3" W x 9" D) (44.7cm H x 16cm W x 23cm D)	7 lbs. (3.2 kg)	NSF
	36725.0100		6 units/ case			41 lbs. (18.6 kg)	
1.9 litre Thermal Carafe *(Black Lid)*	36029.0001		single unit	1.9 litres (64 oz.)	8" H x 6.4" W x 8.2" D (20.3cm H x 16.3cm W x 21cm D)	3.0 lbs. (1.36 kg)	
	36029.0000		12 units/ case			34 lbs. (15.4 kg)	
1.9 litre Thermal Carafe *(Orange Lid)*	36252.0001		single unit			3.0 lbs. (1.36 kg)	
	36252.0000		12 units/ case			34 lbs. (15.4 kg)	
1.9 litre Economy Thermal Carafe *(Black Lid)*	40163.0000		single unit		7.1" H x 6.6" W x 8.64" D (18cm H x 16.8cm W x 21.9cm D)	2.5 lbs. (1.1 kg)	NSF
	40163.0100		12 units/ case			30 lbs. (13.6 kg)	
1.9 litre Economy Thermal Carafe *(Orange Lid)*	40163.0001		single unit			2.5 lbs. (1.1 kg)	
	40163.0101		12 units/ case			30 lbs. (13.6 kg)	
1.9 litre Vacuum Pitcher *(Black Lid)*	39430.0000	Stainless Steel	single unit		11.3" H x 6.5" W x 5.5" D (28.7cm H x 16.5cm W x 14cm D)	3.0 lbs. (1.36 kg)	
	39430.0100		6 units/case			17 lbs. (7.71 kg)	

Thermal Coffee Brewers, Servers and Stands

CWTF-TS

- Pourover feature included on automatic brewer models.
- Hot water faucet available.
- Holds up to 4" (10.16 cm) tall cup.
- Use BUNN paper filters – Product No. 20115.0000.

THERMAL SERVER

- Convenient for keeping coffee hot for hours.
- Easily transported to remote locations.
- Depending on base, server can hold up to 6½" (16.51 cm) cup.

THERMAL SERVER RACK

- Holds one or two 2.5 litre thermal servers without base.
- Made of durable, easy-to-clean plastic with drip trays to catch spills and keep serving areas clean.

TSR-1 and TSR-2
(shown with TS servers no base)

TS Booster

TSR
(Raised)

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Brewing Capacity	Cord Attached	Agencies
CW15-TS *(Pourover)*	23000.0000	27.6" H x 9" W x 18.5" D (70.1cm H x 22.9cm W x 47cm D)	27 lbs. (12.3 kg)	120	11.4	1370	3.9 gal. (14.6 L/hr)	Yes	UL LISTED NSF
CWTF15-TS *(Automatic w/faucet)*	23000.0006		32 lbs. (14.6 kg)						

THERMAL SERVERS AND STANDS						
Model	Product #	Dimension	Weight	Capacity	Quantity	Agencies
TS	23300.0007	19.6" H x 7.9" W x 8.7" D (49.8cm H x 20.1cm W x 22.1cm D)	6 lbs. (2.7 kg)	2.5 litres (84 oz.)	single unit	NSF
	23300.0005		33 lbs. (15 kg)		6/case	
TSR *(Raised)*	23300.0009	21.8" H x 7.9" W x 8.9" D (55.4cm H x 20cm W x 22.6cm D)	6 lbs. (2.7 kg)		single unit	
TS *(no base)*	23300.0010	14.4" H x 7" W x 8.1" D (36.6cm H x 17.8cm W x 20.6cm D)	4 lbs. (1.8 kg)			
	23300.0006		25 lbs. (11.3 kg)		6/case	
BUNN Safety-Fresh® Lid *(Kit)*	22964.0000		1 lb. (.5kg)		single unit	
TSR-1	18008.6001	25" H x 7.5" W x 8.5" D (63.5cm H x 19.1cm W x 21.6cm D)	4.5 lbs. (2.1 kg)	1 Thermal Server w/out Base		
TSR-2	18008.6002	28.5" H x 7.5" W x 17" D (72.4cm H x 19.1cm W x 43.2cm D)	8 lbs. (3.6 kg)	2 Thermal Servers w/out Bases		
TS Booster	18010.6000	6" H x 9.25" W x 8.25" D (15.2cm H x 23.5cm W x 21cm D)	2 lbs. (.9 kg)	1 Thermal Server w/out Base		No Listing

Titan™ Dual and Single Coffee Brewers

Titan Dual Brewer

High volume brewing solution featuring Digital Brewer Control, precise extraction control and portable servers

- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; variable by-pass controls coffee strength.
- BrewMETER® allows automatic programming of pulse routine.
- Funnel has 28 ounce (.8 litre) capacity and paper filter retainers to eliminate fold-over.
- Left or right faucet for hot water.
- Use BUNN paper filter – Product No. 20111.0000.

Titan Single Brewer

Titan TF Server

TITAN TF SERVER

- Insulated server keeps coffee hot for hours.
- Contemporary styling and wrap program for maximum merchandising.
- Large cup clearance allows for dispensing into cups, decanters and thermal carafes.
- Integrated sight gauge assembly allows for easy cleaning.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Dimension	Weight	Cord Attached	Agencies
Titan Dual	39200.0000	120/208 *(3 phase)*	33.4	12000	34.3 gal. (129.8 L)	40"H x 35.6"W x 21.7"D 101.7cm H x 90.5cm W x 55.2cm D)	148 lbs. (67.1 kg)	No	c UL us LISTED NSF
		120/208 *(1 phase)*	40.1	8200	22.9 gal. (86.7 L)				
Titan Single	39300.0000	120/208 *(3 phase)*	33.4	12000	22.5 gal. (85.2 L)	40.02" H x 21.3"W x 21.74" D (101.7cm H x 54.1cm W x 55.2cm D)	107 lbs. (48.5 kg)		
		120/208 *(1 phase)*	40.1	8200	17 gal. (64.4 L)				
Titan TF Server	39400.0001					23.7"H x 13.7"W x 17.1"D (60.2cm H x 34.8cm W x 43.4cm D)	17.5 lbs. (7.9 kg)		NSF

BrewWISE® ThermoFresh® Brewers

BrewWISE Dual TF

The TF brewers use Digital Brewer Control and feature vacuum-insulated ThermoFresh servers that hold beverages at optimum flavor profile for hours without requiring the energy consumption of traditional warming plates

- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence for simplified programming.
- Variable by-pass controls coffee strength.
- Simplify installation and calibration by creating coffee recipe cards and dedicated funnels with the Recipe Writer using your PC *(U.S. and English MS Windows® compatible)*.
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.
- Compatible with BUNNlink®.

BrewWISE Recipe Writer



BrewWISE Single TF

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Funnel Locks	Finish	Dimension	Weight	Cord Attached	Agencies
Single TF DBC	34800.0000	120/240	16.6	4000	11.4 gal. (43.2 L)	Yes	SST	35.7" H x 12.1"W x 19.2" D (90.7cm H x 30.7cm W x 48.8cm D)	59 lbs. (26.8 kg)	No	c UL us LISTED NSF
	34800.0002	120/208	19.2			No					
	34800.0003	120/208	19.2			Yes					
	34800.0004	120/240	16.6			No	Black				
	34800.0001					Yes					
	34800.0008	120	18.1	2200	6.5 gal. (24.6 L)						
	34800.0017	120					SST				
Dual TF DBC	34600.0000	120/240	27.5	6600	18.9 gal. (71.5 L)			35.7"H x 21.8"W x 20.2"D (91.7cm H x 55.4cm W x 51.3cm D)	92.5 lbs. (42 kg)		
	34600.0001						Black				
	34600.0002					No	SST				
	34600.0003						Black				
	34600.0004	120/208	27.4	5700	16.3 gal. (61.7 L)		SST				
	34600.0005						Black				
	34600.0006		27.4			Yes	SST				
	34600.0007		27.4				Black				
Recipe Writer	34444.0000	120	1					2.2" H x 6.4"W x 9.5" D (5.6cm H x 16.2cm W x 21.4cm D)	6.1 lbs. (2.8 kg)		
Recipe Card	34447.0000								1.2 lbs.		
Ad Card	34448.0000								1.2 lbs.		

Digital ThermoFresh® Servers and Stand

1.5 Gal TF Server

ThermoFresh servers hold beverages at optimum flavor profile for hours without requiring the energy consumption of traditional warming plates

- Four-hour digital count-up timer.
- Volume indicator display.
- Vacuum insulated.
- Unique lid design features a pour spout for easy emptying and cleaning.
- Contemporary styling and wrap program for maximum merchandising.
- Digital sight gauge has a count-up timer that begins to count-up in one minute increments to specifically display how long the brewed beverage has been stored. Operates on four AAA batteries with an average 1-year lifespan. Display shows low battery symbol.
- Translucent faucet guard provides increased visibility while dispensing.
- Brew-through lid.
- Soft grip handle for easy transportation.

TF SERVER WITH BASE

- Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels.
- Large cup clearance.
- Ideal for use with Single or Dual DBC Brewers.

Digital Sight Gauge with Count-up Timer

Baseless 1 5 Gal TF Server

TF BASELESS SERVER

- 7.05" (17.9 cm) cup clearance.
- Ideal for use with the Infusion Coffee Brewer (ICB)
- Use with the TF Server Stand for easy dispensing. Product No. 39795.0000

TF Server Stand

Model	Product #	Holding Capacity	Finish	Dimension	Weight	Cord Attached	Agencies
TF Server	42700.0000	1 gal (3.8 L)	SST	20.6" H x 9.3" W x 13" D (52.3cm H x 23.6cm W x 33cm D)	15 lbs. (6.8 kg)	No	NSF
	42700.0001		Black				
	42750.0000	1.5 gal (5.7 L)	SST	22.7" H x 9.3" W x 13" D (57.7cm H x 23.6cm W x 33cm D)	16 lbs. (7.3 kg)		
	42750.0001		Black				
Baseless TF Server	42700.0050	1 gal (3.8 L)	SST	12.6" H x 9.1" W x 12.7" D (32cm H x 23.1cm W x 32.3cm D)	11 lbs. (4.9 kg)	No	NSF
	42700.0051		Black				
	42750.0050	1.5 gal (5.7 L)	SST	14.7" H x 9.1" W x 12.7" D (37.3cm H x 23.1cm W x 32.3cm D)	12 lbs. (5.4 kg)		
	42750.0051		Black				
TF Server Stand	39795.0000			8.7" H x 9.4" W x 12.9" D (22.1cm H x 23.9cm W x 32.8cm D)	4.2 lbs. (1.9 kg)		

ThermoFresh® Servers and Stand

1.5 Gal TF Server

ThermoFresh servers hold beverages at optimum flavor profile for hours without requiring the energy consumption of traditional warming plates

- Vacuum insulated.
- Easily transport coffee to remote locations.
- Fast flow faucet.
- Brew-through lid.

TF SERVER WITH BASE

- Built-in drip tray is easily removed for cleaning or providing extra clearance for large vessels.
- Large cup clearance.
- Ideal for use with Single or Dual TF DBC Brewers.

TF Servers	For Use With	Page #
with base - digital or mechanical gauge	Single TF DBC	26
	Dual TF DBC	
	ICB Tall, ICB Twin Tall	18
	ITCB (tall)	51
	ITCB-DV HV, ITCB-Twin HV	52
baseless - digital or mechanical gauge	ICB	17
	ICB-Twin	

Baseless 1 Gal TF Server

TF BASELESS SERVER

- Use with the TF Server Stand for easy dispensing. Product No. 39795.0003
- Ideal for use with the Infusion Coffee Brewer (ICB).

TF Server Stand

Model	Product #	Holding Capacity	Finish	Dimension	Weight	Cord Attached	Agencies
TF Server	39500.0000	1 Gallon (3.8 L)	SST	20.8" H x 9.3" W x 13"D (52.8cm H x 23.6cm W x 33cm D)	13 lbs. (5.9 kg)	No	NSF
	39500.0001		Black				
	39550.0000	1.5 Gallon (5.7 L)	SST	22.9" H x 9.3" W x 13" D (58.2cm H x 23.6cm W x 33cm D)	14 lbs. (6.4 kg)		
	39550.0001		Black				
Baseless TF Server	39500.0004	1 Gallon (3.8 L)	SST	12.8" H x 9.1"W x 13.1" D (32.5cm H x 23.11cm W x 33.3cm D)	13 lbs. (5.9 kg)		
	39500.0005		Black				
	39550.0004	1.5 Gallon (5.7 L)	SST	14.9" H x 9.1"W x 13.1" D (37.8cm H x 23.11cm W x 33.3cm D	14 lbs. (6.4 kg)		
	39550.0005		Black				
TF Server Stand	39795.0003			8.7" H x 9.4"W x 12.9" D (22.1cm H x 23.9cm W x 32.8cm D)	4.2 lbs. (1.9 kg)		

BrewWISE® Soft Heat® DBC® Brewers

BrewWISE Dual SH DBC

Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavor profile for hours

- Brews ½, 1, or 1 ½ (1.9, 3.8 or 5.7 litre) gallon batches.
- Stores individual coffee recipes.
- Large sprayhead and BrewWISE intelligence for simplified programming.
- Variable by-pass controls coffee strength.
- Dual holds two 1½ gallon (5.7 litre) SH servers. Single holds one server.
- Simplify installation and calibration by creating coffee recipe cards and dedicated funnels with the Recipe Writer using your PC *(U.S. and English MS Windows® compatible)*.
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.
- Compatible with BUNNlink®.

BrewWISE
Single SH DBC

Model	Product #	Volts	Amps	Watts	Faucet Location	Brewing Capacity	Finish	Dimension	Weight	Cord Attached	Agencies
Single SH DBC	33600.0000	120/240	17.5	4100	Upper	11.4 gal. (43.2 L)	Stainless	35.8"H x 9.3"W x 23.1"D (90.9cm H x 23.6cm W x 58.7cm D)	59 lbs. (26.8 kg)	No	c UL us LISTED NSF
	33600.0001 *(funnel lock)*										
	33600.0013						Black				
Dual SH DBC	33500.0000		29.1	6800		18.9 gal. (71.5 L)	Stainless		90 lbs. (40.8 kg)		
	33500.0004						Black		89 lbs. (40.4 kg)		
	33500.0006				Lower		Stainless		90 lbs. (40.8 kg)		

Soft Heat® Brewers

Dual SH

Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavor profile for hours

- Variable batch selector knob allows ½, 1 or 1½ gallon (1.9, 3.8 or 5.7 litre) batches.
- Electronic grinder interface instructs grinder on exact amount of coffee for selected brew batch size.
- Dual holds two 1½ gallon (5.7 litre) SH servers. Single holds one server.
- Soft Heat® server heat control automatically shuts off once target temperature is reached. Can be set to 175°-190°F (79.4° - 87.8°C).
- Remote 1 or 2 server docking stations *(sold separately)*.
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.

Single SH

Model	Product #	Finish	Volts	Amps	Watts	Capacity	Dimension	Weight	Cord Attached	Agencies
Single SH	27800.0001	Stainless	120/208	18.3	3800	10.6 gal. (40.1 L)	35.8"H x 9.3"W x 20.2"D (90.9cm H x 23.6cm W x 50.8cm D)	61 lbs. (27.7 kg)	No	UL LISTED NSF
	27800.0002		120/240	17.9	4300	11.4 gal. (43.2 L)		59 lbs. (26.8 kg)		
	27800.0009		120	17.5	2100	5.1 gal. (19.3 L)		57 lbs. (25.9 kg)		
Dual SH	27900.0001		120/208	28.3	5900	16.3 gal. (61.7 L)	35.8"H x 18"W x 20.5"D (91cm H x 45.7cm W x 52.1cm D)	90 lbs. (40.9 kg)		
	27900.0002		120/240		6800	18.9 gal. (71.5 L)		89 lbs. (40.4 kg)		
	27900.0020	Black	120/208		5900			90 lbs. (40.9 kg)		

Soft Heat® Servers and Stands

1 SH Server
and Docking Station

Soft Heat technology automatically manages heat in the server docking system to ensure optimum flavor profile for hours

SOFT HEAT® SERVER

- Soft Heat® servers supply controlled heat to coffee.
- LED power indicator.
- Safety-Fresh® brew-through lid with vapor seal and spill prevention.

	For Use With	Page #
Soft Heat Server	Single SH DBC	29
	Dual SH DBC	
	Single SH	30
	Dual SH	

2SH Docking Station

SOFT HEAT DOCKING STATION

- Remote one and two server docking stations.
- Instant power contact with servers.

Model	Product #	Volts	Amps	Watts	Capacity	Setting	Legs	Finish	Dimension	Weight	Cord Attached	Agencies
1SH Stand	27825.0000	120	0.75	90	1 SH Server		4"	Stainless	28.2"H x 10"W x 14"D (71.6cm H x 25.4cm W x 35.6cm D)	13 lbs. (5.9 kg)	Yes	
	27825.0004						6"	Black				
	27825.0003						4"					
2SH Stand	27875.0000		1.5	180	2 SH Servers			Stainless	11.6"H x 18.7"W x 13.2"D (29.5cm H x 47.5cm W x 33.5cm D)	22 lbs. (10 kg)		
	27875.0003							Black				
SH Server	27850.0001				1 1/2 Gal			Stainless	16.6"H x 8.5"W x 14" D (42.2cm H x 21.6cm W x 35.6cm D)	17 lbs. (7.8 kg)	No	c UL us LISTED NSF
	27850.0004				1 1/2 Gal			Black		18 lbs. (8.2 kg)		
	27850.0006					45 Min.		Stainless		17 lbs. (7.8 kg)		
	27850.0008					60 Min.		Black				
	27850.0009					Adjustable Timer		Stainless				
	27850.0016					240 Min.						
	27850.0022					120 Min.		Black				

BrewWISE® GPR DBC® Brewers

Dual

Single

Brewers that utilize Digital Brewer Control to manage the brewing process from start to finish and feature portable server solutions

- Brews 12.5 gallons (47.3 litres) per hour.
- Brews ½, 1 or 1½ gallon (1.9, 3.8 or 5.7 liter) batches.
- Stores individual coffee recipes so operator can easily brew many varieties.
- Coffee extraction controlled with pre-infusion and pulse-Brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.*
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface through the Smart Funnel®.*
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC *(Windows® compatible)*.*
- Dual voltage brewer can be connected to 120V, 120/208V or 120/240V electrical.
- Troubleshoot all switches and electrical components from the front panel with advanced diagnostic service tools.
- Programmable freshness indication.
- Message display alerts when freshness timer expires and when warmers will automatically shut off.
- Programmable warmer control.
- Energy Saver Mode.*
- BUNN warranty includes 3 years parts and labor on electronic control boards and 2 years parts and 1 year labor on all other components.

DUAL GPR DBC

- Brews 18.9 gallons (71 5 liters) per hour.
- Brews ½, 1, or 1½ gallon (1.9, 3.8 or 5.7 liter) batches.

** For detailed descriptions of BUNN terms, please refer to pages 1-2.*

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Finish	Dimension	Weight	Cord Attached	Agencies
Single GPR DBC	36100.0016	120	15	1800	4.7 gal. (17.8 L)	Stainless	29.6 H x 9.2"W x 20" D (75.2cm H x 23.4cm W x 50.8cm D)	67 lbs. (30.4 kg)	Yes	UL LISTED NSF
		120/208	16.8	3400	9.5 gal. (36 L)					
		120/240	19.2	4500	12.5 gal. (47.3 L)					
Dual GPR DBC	35900.0010	120/ 208-240	25 - 29	5200 - 6800	14.8-18.9 gal. (43.2 L)		29.3 H x 18"W x 20" D (74.4cm H x 45.7cm W x 50.8cm D)	90 lbs. (40.8 kg)	No	

Single® and Dual® Brewers

Dual

- Brews ½, 1 or 1½ gallon (1.9, 3.8 and 5.7 litre) batches.
- Adjustable bypass ensures perfect coffee regardless of batch size.
- Electronic timer ensures fast set up and accurate brew levels.
- Electronic grinder interface instructs G9T HD grinder on exact amount of coffee for selected brew batch size.
- 1.5 GPR portable server *(included)* has a Safety-Fresh® brew-through lid with vapor seal and spill protection.
- Equipped with tank drain.
- Use BUNN paper filter – Product No. 20138.0000.

Single

NOTE: Catalog icon legend can be found on page 1.

Model	Product #	Volts	Amps	Watts	Brewing Capacity	Batch Settings	Funnel Type	Finish	Dimension	Weight	Cord Attached	Agencies
Single	23050.0006	120	17.5	2100	5.1 gal. (19.3 L)	One	Plastic	Stainless	29.3"H x 9.25"W x 19"D (74.4cm H x 54.9cm W x 48.3cm D)	57 lbs. (25.9 kg)	No	UL LISTED NSF
	23050.0007			2100		Three	Stainless			58 lbs. (26.3 kg)		
	23050.0010	120/208	18.3	3800	10.6 gal. (40.1 L)							
	23050.0011	120/240	17.9	4300	11.4 gal. (43.2 L)					59 lbs. (26.8 kg)		
Dual	20900.0008	120/208	28.8	5990	16.3 gal. (67.7 L)	One	Plastic		29.3"H x 18"W x 19.3"D (74.4cm H x 45.7cm W x 49cm D)	92 lbs. (41.8 kg)		
	20900.0010					Three	Stainless			94 lbs. (42.7 kg)		
	20900.0011	120/240	28.7	6890	18.9 gal. (71.5 L)					95 lbs. (43.1 kg)		

1 Gallon Automatic Brewers

Single AXIOM

Single CWTF

SINGLE AXIOM®

- Brews 4.5 to 9.0 gallons (17.0 to 34.1 litres) of perfect coffee per hour.
- 1/2 gallon and 1 gallon (1.9 and 3.8 litre) batches brewed into 1.5 GPR portable server *(included)*.
- Large 200oz. (5.9 litre) tank.
- Adjusts automatically to varying water pressure.
- For high lime areas, BrewLOGIC® technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD® technology simplifies brewer programming.
- Gourmet funnel allows use of heavier throw weights of coffee.

SINGLE CWTF

- Brew half gallon and 1 gallon (1.9 and 3.8 litre) batches into included 1.5 GPR portable server.
- Gourmet funnel models allows use of heavier throw weights of coffee.
- 1.5 GPR portable server *(included)* has a Safety-Fresh® brew-through lid with vapor seal and spill protection.
- Half gallon (1.9 litre) pourover backup.
- Gourmet funnel requires BUNN paper filter 20100.0000.

Model	Product #	Finish	Volts	Amps	Watts	Brewing Capacity	Funnel Type	Dimension	Weight	Cord Attached	Agencies
Single AXIOM-15	38700.0043	Stainless	120	13.8	1600	4.5 gal. (17 L)	Gourmet Stainless	26.1"H x 8.5"W x 18.9"D (66.3cm H x 21.6cm W x 48cm D)	30 lbs. (13.6 kg)	Yes	UL LISTED, NSF
Single AXIOM-35	38700.0045		120/208-240	15.8	3650	7.5/9.0 gal. (28.4/34.1 L)				No	
Single CWTF15	35000.0004		120	13.8	1650	3.8 gal. (14.4 L)			46.5 lbs. (21 kg)	Yes	
Single CWTF35	35000.0006		120/208-240	15.8	3650	7.5/9.0 gal. (28.4/34.1 L)				No	

Portable Servers and Warmers

1.5 GPR
Portable Server

PORTABLE SERVER

- 1 or 1½ gallon (3.8, 5.7 litre) capacities.
- Easily transport portable servers for remote service.
- Safety-Fresh® brew-through lid with vapor seal and spill protection GPR servers.

RWS1
Warmer

WARMER

- Available with plastic, satin nickel or stainless steel legs.
- Legs are adjustable on RWS1.

	For Use With	Page #
GPR Server	Single GPR DBC	32
	Dual GPR DBC	
	Single CWTF	34
	Single AXIOM	
	Single	33
	Dual	

Model	Product #	Dimension	Weight	Finishes	Volts	Amps	Watts	Capacity	Cord Attached	Agencies
1GPR *(bail handle)*	12487.0001	14"H x 8.5"W x 12.7"D (35.6cm H x 21.6cm W x 32.2cm D)	8.5 lbs. (3.9 kg)	Stainless				1 gal (3.8 L)		NSF
1GPR *(side handle)*	12487.0003									
1GPR-FF *(bail handle, fast flow faucet)*	12487.0005		9 lbs. (4.1 kg)							
1.5GPR-FF *(top handle, fast flow faucet)*	20950.0004	18.1"H x 8.5"W x 12.7"D (46cm H x 21.6cm W x 32.2cm D)	10 lbs. (4.5 kg)					1 1/2 gal (5.7 L)		
RWS1 *(plastic legs)*	12203.0010	7.5" H x 8.25"W x 9.3" D (19.1cm H x 21cm W x 23.6cm D)	7 lbs. (3.2 kg)		120	0.8	100	1 or 1.5 GPR	Yes	UL LISTED NSF
RWS1 *(satin nickel legs)*	12203.0014		9 lbs. (4.1kg)							

Multi-Hopper Grinders

MHG

A superior coffee grinding system combines the ability to grind multiple coffees with BrewWISE® Technology

- Convenient, front-loading hoppers.
- Stores individual coffee grind weights.
- Portion controlled for the right amount of coffee, with three batch sizes per hopper.
- Precision burrs for consistent, commercial quality grind.
- Easy-to-clean removable hoppers.
- LCD alphanumeric display shows coffee names and diagnostics.
- Accommodates all BrewWISE® Smart Funnels®.
- Smart Hopper® manages the grinding and brewing process from start to finish through a microchip.
- Create coffee recipe cards with BrewWISE recipe writer on your PC. *(See page 30.)*
- Compatible with BUNNlink®; three-year warranty on grinding burrs.

RACK AND HOPPER

- Racks help store and display coffee varieties and promote fresh ground coffee program.
- Hoppers serve as storage containers when not in the grinder. Locking lid prevents tampering.

2 Position Storage System

4 Position Storage System

Hopper Assembly

MHG

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Capacity	Cord Attached	Agencies
MHG *(SST)*	35600.0000	29.1" H x 9.4" W x 17.5" D (73.9cm H x 23.8cm W x 44.5cm D)	70 lbs. (31.8 kg)	120	11	1320	6 lbs./hopper (2.7 kg/ hopper)	Yes	c UL us LISTED
MHG *(Black)*	35600.0002								
2 Position Rack	36760.0000	11.37" H x 9.76"W x 15.74" D (28.88cm H x 24.79cm W x 39.98cm D)	4.3 lbs. (2.0 kg)				2 hoppers		
4 Position Rack	36760.0001	24.25" H x 9.76"W x 15.74" D (61.6cm H x 24.79cm W x 39.98cm D)	6.4 lbs. (2.9 kg)				4 hoppers		
Hopper Assembly	36845.0000	11.75" H x 4.23"W x 15.9" D (29.85cm H x 10.74cm W x 4.39cm D)	5 lbs. (2.3 kg)						

Weight Driven Grinder

G9WD-RH

Weight-based, portion-control for the right amount of coffee every time, with 3 batch sizes

- Unparalleled grind weight accuracy.
- Hopper holds up to 6 lbs. (2.72 kg.).
- Precision burrs for consistent, commercial quality grind.
- LCD alphanumeric display shows machine status and diagnostics.
- Removable hopper for easy cleaning.

G9WD-RH

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Finish	Capacity	Cord Attached	Agencies
G9WD-RH	40700.0001	29.8"H x 8.14"W x 19.3"D (75.7cm Hx 20.7cm W x 49.0cm D)	70 lbs. (31.8 kg)	120	11	1128	Stainless	6 lbs./ hopper (2.7 kg/ hopper)	Yes	
	40700.0002						Black			

Portion Control Grinders

G9-2T DBC

- Portion controlled for the right amount of coffee every time.
- Precision burrs for consistent, commercial-quality grind.
- G9T HD model has optional interface to BUNN brewers for multiple batch sizes.
- The G9T HD and G92T HD accommodate larger brew funnels.
- Three-year warranty on grinding burrs.

BrewWISE® DBC® GRINDER

- Stores individual coffee grind profiles.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface via Smart Funnel® and Dual Soft Heat® DBC® brewer.
- Compatible with BUNNlink®.

G9-2 HD

G9HD

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Finish	Capacity	Cord Attached	Agencies
G9HD *(Analog)*	05800.0001	22.3" H x 8" W x 17.8" D (63.5cm H x 20.3cm W x 45.2 cm D)	62 lbs. (28.1 kg)	120	9.4	1128	Stainless	ONE HOPPER	Yes	UL LISTED, ETL
	05800.0013						Black	9 lbs. (4.1 kg.)		
G9T HD *(Analog)*	05800.0003	27" H x 8" W x 17.8" D (68.6cm H x 20.3cm W x 45.2 cm D)					Stainless			
G9T HD *(Brewer Interface)*	05800.0027		67 lbs. (30.4 kg)							
G9-2 HD *(Brewer Interface)*	24250.0000	25" H x 8" W x 17.8" D (63.5cm H x 20.3cm W x 45.2cm D)						TWO HOPPERS		
G9HD-S *(Analog)*	24250.0011							6 lbs./ hopper (2.7 kg/ hopper)		
G9-2T HD *(Brewer Interface)*	24250.0021	27.1" H x 8" W x 17.8" D (63.5cm H x 20.3cm W x 45.2 cm D)	68 lbs. (30.9 kg)							
G9-2T DBC *(Wireless interface)*	33700.0000		67 lbs. (30.4 kg)							
	33700.0001						Black			

Grinders *(FPG-2 DBC excluded)*

FPG-2 DBC

LPG

- Low profile design.
- Professional grind provided by large 3.19" (81 mm) diameter burrs.
- Powered by quiet, high-torque motor.
- Two hoppers allow for regular and decaf or specialty beans. *(LPG-2)*
- Three-year warranty on grinding burrs.

FPG

- Accommodates up to 8" (20.3 cm) tall French press or funnel for drip-style brewer.
- Multi-batch setting allows users to specify a French press brew size or grind enough coffee into a funnel to brew up to 3.0 litres of drip-style coffee.
- Professional grind provided by large 3.19" (81 mm) diameter commercial grinding burrs powered by quiet, high torque motor.
- Digital touch pad for front of machine programming and LCD read-out. *(FPG-2 DBC)*
- Three-year warranty on grinding burrs.
- Can accommodate gourmet funnel *(34559.0000 or 34559.0001)* for heavier throw weights.

LPG

LPG-2

FPG

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Capacity	Cord Attached	Agencies
LPG	20580.0001	15.1" H x 8.64" W x 10" D (38.4cm H x 21.95cm W x 25.4cm D)	23 lbs. (10.5 kg)	120	3	360	6 lbs. (2.7 kg.)	Yes	UL LISTED, ETL
LPG2E	26800.0000	17.5" H x 8.6" W x 11" D (44.5cm H x 21.84cm W x 27.94cm D)	28 lbs. (12.7 kg)	120	3.5	420	3 lbs./hopper (1.4 kg)	Yes	UL LISTED, ETL
LPG2E w/4" SS legs	26800.0001	17.5" H x 8.6" W x 11" D (44.5cm H x 21.84cm W x 27.94cm D)	30 lbs. (13.6 kg)	120	3.5	420	3 lbs./hopper (1.4 kg)	Yes	Not listed
FPG-2 DBC	36400.0000	21.8" H x 8.6" W x 11" D (55.4cm H x 21.84cm W x 28cm D)	31 lbs. (14.06 kg)	120	3.5	420	3 lbs./hopper (1.4 kg/hopper)	Yes	UL LISTED, ETL
FPG	36800.0000	20" H x 8.6" W x 10" D (50.8cm H x 21.8cm W 25.4cm D)	30 lbs. (13.6 kg)	120	3.5	420	6 lbs./hopper (2.7 kg/hopper)	Yes	UL LISTED, ETL

Bulk Coffee Grinders *(G2 and G3 only)*

G1 HD

G1, G2, G3 HD GRINDERS

- Turbo action draws coffee through grind chamber for greater grinding efficiency.
- Grinds one pound in under 30 seconds.
- Wide range of grinds can be selected.
- Convenient cleaning lever ensures complete clean out of grind chamber.
- Bag switch prevents grinding before bag is in place.
- Heavy-duty precision burrs for quality, finer grinds.
- Three-year warranty on grinding burrs.

G2 trifecta™ GRINDER

- Chute assembly accommodates trifecta brew cup.
- Expanded range of precise grinds can be selected.
- May be used as a bulk grinder in behind-the-counter applications.
- Hopper holds 2 lbs. (.91 kg) of fresh coffee beans.

G2 trifecta

G2 HD

G3 HD

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Capacity	Cord Attached	Agencies
G1 HD Black	22104.0000	22.7" H x 7.3" W x 16" D (57.9cm H x 18.54cm W x 40.64cm D)	57 lbs. (15.9 kg)	120	9	1080	1 lb. (.45 kg)	Yes	UL LISTED ETL
G1 HD Red	22104.0001								
G2 HD Black	22102.0000	26.4" H x 7.3" W x 16" D (67.1cm H x 18.54cm W x 40.64cm D)	59 lbs. (26.8 kg)				2 lbs. (.9 kg)		
G2 HD Red	22102.0001								
G2 trifecta	41900.0000	26.5" H x 7.3" W x 15.9" D (67.3cm H x 18.54cm W x 40.4cm D)							
G3 HD Black	22100.0000	26.8" H x 7.4" W x 16" D (68.1cm H x 18.54cm W x 40.64cm D)					3 lbs. (1.4 kg)		
G3 HD Red	22100.0001								

BUNN Espress® Cool Froth® and S2

Tiger Cool Froth EXT
(external milk)

Simple solution for exceptional espresso beverages from a sleek, compact super-automatic

- Up to 180 shots per hour from less than 16" (41 cm) of counter space.
- Intelligent modular brewing chamber for consistent flavor profile.
- Simulates barista tamping and polishing motion to provide uniform extraction.
- Two grinders for variety of espresso beans.
- Each hopper holds 1.75 lbs. (.8 kg) of fresh beans.
- Adjusts for 4.5 to 7.4 inch (11.4 to 18.8 cm) cup clearance.
- Brews ESE pods.
- Intuitive control pad guides user through steps for making drinks.
- Easy daily cleaning.

BUNN ESPRESS TIGER COOL FROTH

- Innovative milk delivery system does not inject steam or water to dilute the foam for a full, rich flavor experience.
- Perfectly foams cold milk for great tasting iced cappuccino.
- Your choice of many drink selections: espresso, cappuccino, latte and iced cappuccino, and more.
- Available with a self-contained 1 gallon (3.79 L) milk drawer.
- EXT (external milk) model allows milk from two sources, expanding your beverage menu. *(see page 47)*

BUNN ESPRESS TIGER S2

- Intellisteam® wand shuts steam off when the milk reaches the preset temperature. No need to monitor temperature with a thermometer.

Tiger Cool Froth
(with milk drawer)

Tiger S2

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Cord Attached	Agencies
Tiger Cool Froth	35800.0008	25.5"H x 15.8"W x 18.1"D 64.8cm H x 40.1cm W x 45.9cm D)	103 lbs. (46.7 kg)	120	16	1850	Yes	c UL us LISTED NSF
Tiger Cool Froth	35800.0009			208	12	2400	Yes/no plug	
Tiger Cool Froth EXT external milk	35800.0010	19.3"H x 15.8"W x 18.1"D 49cm H x 40.1cm W x 45.9cm D)	88 lbs. (40 kg)	120	16	1850	Yes	
Tiger Cool Froth EXT external milk	35800.0011			208	12	2400	Yes/no plug	
Tiger S2 with steam wand	35800.0006	25.5"H x 15.8"W x 18.1"D 64.8cm H x 40.1cm W x 46cm D	103 lbs. (46.7 kg)	120	16	1850	Yes	
Tiger S2 with steam wand	35800.0007			208	12	2400	Yes/no plug	

BUNN Espress® Black & White 3 S2

Black & White 3 S2

Simple solution for exceptional espresso beverages from a sleek, compact super-automatic

- Handsome chrome housing.
- Dispense sput adjusts from 3" to 6.8".
- Easy to use touch screen with beautiful graphics to guide operator through functions.
- Simple daily cleaning processwith reminder and lockout.
- Intellisteam® wand automatically steams to proper milk temperature - no need to monitor with a thermometer.
- Two hoopers, each with a capacity of 3.3 lbs. (1.5 kg) for your choice of fresh espresso beans.
- Adjusts for 4.5 to 7.4 inch (11.4 to 18.8 cm) cup clearance.
- Heavy duty grinder.
- Stainless steel brew chamber.
- Built-in troubleshooting menu.
- Modular design of systems - maintenance is fast and easy.

NOTE: Catalog icon legend can be found on page 1.

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Cord Attached	Agencies
B&W3-S2	43500.0010	28.7"H x 20.5"W x 23.6"D 72.9cm H x 52.1cm W x 59.9cm D)	202 lbs. (91.6 kg)	208	16	1850	Yes	
				240	12	2400	Yes/no plug	

Steamer, Cup Warmer and Espresso Refrigerator

Steamer

STEAMER

- Intellisteam® wand shuts steam off when the milk reaches the preset temperature.
- Consistent steam temperature for back-to-back steaming.
- Stand alone unit produces dry steam that minimizes milk dilution and will not interfere with the brewing capacity of your espresso machine.
- Programmable for timed hot water dispense.
- .85 gallon (3.2 litres) boiler.

CUP HEATER

- Stand alone convection heat unit heats cups to maintain espresso temperature when serving.

ESPRESSO REFRIGERATOR

- Designed to accommodate two standard one gallon (3.79 litre) milk jugs.
- Works in conjunction with the BUNN Espress® Tiger EXT models to deliver higher volume or two types of milk.
- Optional side-by-side or below-counter design.

Espresso Refrigerator

Cup Heater

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Cord Attached	Agencies
Steamer	35800.0401	15.4"H x 9.7"W x 17.7"D 39cm H x 24.6cm W x 45cm D	62 lbs. (28.1 kg)	120	15.8	1900	Yes	c UL us LISTED NSF
Cup Heater	35800.0400	15.4"H x 10"W x 15"D 39cm H x 25.4cm W x 38.1cm D	22 lbs. (10 kg)		0.5	60	Yes	
Espresso Refrigerator	35800.0403	16.7"H x 9"W x 22.3"D (42.4 cm H x 23cm W x 56.6cm D)	40 lbs. (18.1 kg)	115	1.35	155	Yes	

Liquid Coffee Refrigerated Dispenser - High Volume

LCR-3 HV

High volume Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels

- Refrigerated product cabinet extends product flavor profile, adjustable to maintain 41° to 65°F (5° to 18°C) in the product compartment.
- Digital Brewer Control for programming and user interface.
- Holds up to three 1-gallon (3.79 L) BIBs.
- Delivers 6 oz.. (177 mL) per second of hot coffee on demand, 30-145 gallons (113-548.9 L) of coffee per hour *(varies by voltage and incoming water temperature)*.
- 3-phase or single phase operation.
- In two flavor mode, the optional "Auto-Switching" function automatically switches from an empty BIB to a secondary BIB *(left and middle pump only)*.
- Three buttons allow operator to dispense three independent ratios.
- Each dispense button allows the option of up to 3 portion sizes via rotary selection switch.
- 18 gallon (82L) tank capacity.
- Manual hot water faucet.

BIB compartment view

POWER Volts	Phase	Heater Watts	Total Amps	CAPACITY Cups/Hr**	Gal.
120/208	1 Phase	7820	37.6	641	25.0
120/240	1 Phase	10400	43.2	853	33.3
120/208 Y	3 Phase	12000	32.8	961	37.6
120/240 Y	3 Phase	15000	37.6	1280	49.6

***Capacity measured with a 5 oz.. cup and can be increased by preheating incoming water to 140°F maximum.*

Model	Product #	Product Ratios	Dispense Rate/Sec.	Connector Type	Dimension	Weight	Volts/Amps/Watts/Capacity	Cord Attached	Agencies
LCR-3 HV	40800.0000	25:1 - 100:1	6 oz..	Scholle QC	40" H x 33" W x 23.6" D (101.6cm H x 83.8cm W x 59.9cm D)	225 lbs. (102.1 kg)	See chart above.	No	c UL us LISTED NSF
	40800.0001			Scholle 1910					
	40800.0002			QCD-II					

Liquid Coffee Ambient Dispensers (LCA-2 only)

LCA-2, IC

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels

LCA-2, LCA-2 IC

- Accommodates all ½ gallon (1.9 litre) and most one gallon (3.8 litre) BIB containers.
- Insulated product cabinet.
- Convenient flip tray for dispensing into decanters or carafes.
- Compatible with BUNNlink®.

LCA-2

- Global multi-volt design is easily converted to ratings from 100 to 240 volts (50-60 hertz).
- FlavorGard® technology continuously monitors extract-to-water ratio.
- Easy-to-program one touch portion control model is available for self-serve applications.
- Equipped with tank drain.

LCA-2 IC

- Connects to ambient water supply for a final coffee beverage served over ice.

LCA-2

LCA - PC
(LCA is also available with portion control)

Model	Product #	Dispense Rate/Sec. 1.8 oz.. Product Ratios	Dispense Rate/Sec. 2.5 oz..* Product Ratios	Connector Type	Volts	Amps	Watts	Capacity	Dimension	Weight	Cord Attached	Agencies
LCA-2, IC	37700.0000	25:1 - 100:1		Scholle 1910LX	120	2	240	810 cups	30" H x 12.2" W x 24.9" D (76.2cm H x 31cm W x 63.3cm D)	83 lbs. (37.2 kg)	Yes	ETL, cULus, NSF
LCA-2	34400.0001					14.2	1700	125 cups				
	34400.0002	25:1 - 45:1	25:1 - 65:1									
	34400.0003	45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II								
	34400.0004	25:1 - 45:1	25:1 - 65:1									
All models can be changed to these electrical configurations.					208	22.6	4700	385 cups			No	
					240	25.8	6200	512 cups				
LCA-2, PC	36500.0001	45:1 - 100:1	65:1 - 100:1	Scholle 1910LX	120	14.2	1700	125 cups			Yes	cULus
	36500.0002	25:1 - 45:1	25:1 - 65:1									
	36500.0003	45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II								
	36500.0004	25:1 - 45:1	25:1 - 65:1									
All models can be changed to these electrical configurations.					208	22.6	4700	385 cups			No	
					240	25.8	6200	512 cups				

Liquid Coffee Refrigerated Dispensers

LCR-2

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels

- Refrigerated product cabinet maintains 38 – 42° F (3 – 55° C) in product compartment.
- Accommodates all ½ gallon (1.9 litre) and most one gallon (3.8 litre) BIB containers.
- Convenient flip tray allows for dispensing into decanters or carafes.
- Global multi-volt design is easily converted to ratings from 100 to 240 volts (50-60 hertz).
- FlavorGard® technology continuously monitors extract-to-water ratio.
- Easy-to-program one touch portion control model is available for self-serve applications.
- Equipped with tank drain.
- Compatible with BUNNlink®.

LCR - PC
(LCR is also available with portion control)

Model	Product #	Dispense Rate/Sec. 1.8 oz.. Product Ratios	Dispense Rate/Sec. 2.5 oz..* Product Ratios	Connector Type	Volts	Amps	Watts	Capacity	Dimension	Weight	Cord Attached	Agencies
LCR-2	34400.0036	45:1 - 100:1	65:1 - 100:1	Scholle	120	14.2	1700	125 cups	38" H x 12.2" W x 24.9" D (96.5cm H x 31cm W x 63.2cm D)	114 lbs. (51.7 kg)	Yes	NSF, cULus LISTED
	34400.0037	25:1 - 45:1	25:1 - 65:1									
	34400.0038	45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II								
	34400.0039	25:1 - 45:1	25:1 - 65:1									
All models can be changed to these electrical configurations.					208	25.8	4100	385 cups			No	
					240		6200	512 cups				
LCR-2, PC	36500.0036	45:1 - 100:1	65:1 - 100:1	Scholle	120	14.2	1700	125 cups			Yes	
	36500.0037	25:1 - 45:1	25:1 - 65:1									
	36500.0038	45:1 - 100:1	65:1 - 100:1	LiquiBox QC/D II								
	36500.0039	25:1 - 45:1	25:1 - 65:1									
All models can be changed to these electrical configurations.					208	25.8	4700	385 cups			No	
					240		6200	512 cups				

Liquid Coffee Low Profile Dispensers

LCA-2 LP

Coffee-On-Demand dispenser meets the requirements of banquets, convention centers, and hotels

- Attractive appearance with shorter profile.
- Dispense over 120 (5 oz.) cups per hour.
- Accommodates two .5 gallon BIB containers.
- Serves two coffee products and hot water.
- LED lights alert when more concentrate is needed.
- Rinse LED lights alert when cleaning is needed.
- Set up for continuous dispense *(by the cup)* for self-serve applications or portion-control to fill cups or carafes.

LCC-2 LP

- Chilled product cabinet utilizes thermoelectrics for optimal performance.
- Accommodates two .5 gallon BIB containers sized approximately 7.5"H x 5.25"W x 4"D.

LCC-2 LP

Model	Product #	Dispense Rate/Sec. 1.7 oz. Product Ratios	Connector Type	Dimension	Weight	Volts	Amps	Watts	Capacity	Cord Attached	Agencies
LCC-2, LP	38800.0004	25:1 - 100:1	Scholle 1910LX	23.2" H x 15.8" W x 20.9" D (58.9cm H x 40.1cm W x 53cm D)	65 lbs. (29.5 kg)	120	12	1440	120 cups	Yes	NSF, cULus LISTED
	38800.0005		QCDII								
	38800.0006		Scholle Q/C								
	38800.0007		Rapak								
LCA-2, LP	38800.0000		Scholle 1910LX								
	38800.0001		QCDII								
	38800.0002		Scholle Q/C								
	38800.0003		Rapak								

Infusion Series® 3 Gallon Iced Tea Brewers

ITB

ITB
Dual Dilution

ITB-LP

Space-saving brewer yields a variety of flavor profiles and batch options with Digital Brewer Control

- Large tank provides back-to-back brewing capacity, allowing 3 or 5 gallon (11.4 to 18.9 litre) tea batches.
- Brews 16.3 to 26.7 gallons (61.7 to 101.1 litres) per hour from real tea leaves.
- Three recipe buttons and full/half options for maximum flexibility.
- Single button graphic overlay to customize user interface.
- Digital temperature control, pre-infusion, pulse brew and cold brew lockout.
- Easy Pulse interface allows automatic programming of pulse routine.
- Brew counter keeps track of batches brewed.
- Quickbrew (Q) funnel tip for easy conversion.

STANDARD ITB

- Brews into BUNN tea dispensers *(except TDS-5)*.

DUAL DILUTION ITB

- Meet your volume needs; brew 3 gallons (11.4 litres) of iced tea into each dispenser and serve up to 6 gallons (22.7 litres) within a narrow footprint.
- Rotating brew basket, base adapter, color-coded decals, and dedicated dilution nozzles included.
- Specifically designed to accommodate and brew into two BUNN TDO-N-3 5 gallon dispensers *(can also brew directly into standard tea dispensers)*.

SWEETENER MODEL

- Independently set each brew button's sweetener.
- Adjust sweetener volume with the Sweet Meter.
- "Out of Sweetener" indicator
- Separate sweetener inlet - use existing CO_2 systems or external 3rd party pump for sweetener delivery.

LOW PROFILE BREWER

- Brews directly into TDO-3.5 gallon LP dispenser with brew-through lid. *(see page 54 for server and stand)*
- Compact, low-profile styling for variety of spaces.

Dispensers sold separately, see page 54.

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Brewing Capacity	Cord Attached	Agencies
ITB *(29" trunk)*	41400.0000	34" H x 11.6"W x 22"D (86.4cm H x 29.5cm W x 58.4cm D)	44 lbs. (20 kg)	120	14	1700	16.3 gal. (61.7 L)	Yes	UL LISTED NSF
ITB *(with sweetner)*	41400.0001								
ITB *(Dual Dilution)*	41400.0002	34" H x 12.2"W x 22.6"D (86.4cm H x 30.9cm W x 57.4cm D)							
ITB *(Dual Dilution, with sweetner)*	41400.0003								
ITB-LP	41400.0004	28.75" H x 11.57"W x 21.87"D (73cm H x 29.38cm W x 55.55cm D)	43 lbs. (19.5 kg)						

3 Gallon Iced Tea Brewers *(TB3 & TB3Q only)*

TB3

Fresh iced tea brewing solution with simple switch operation for a wide variety of dispensers

TB3 AND TB3Q

- Brews 3 gallons (11.6 litres) at a time directly into any style server.
- Quickbrew (Q) models available for shorter brewing cycles.
- Dispenser sold separately *(except TB3Q w/TD4T)*.
- Use BUNN paper filters - Product No. 20100.0000.

LOW PROFILE TEA BREWER

- Brews directly into TDO-3.5 gallon LP dispenser with brew-through lid. *(see page 54 for server and stand)*
- Sleek, compact, low-profile styling to accommodate a variety of spaces.
- Quickbrew (Q) model for available shorter brewing cycle.

Dispensers sold separately, see page 54.

TB3/TB3Q	Tea Dispensers
25.75" trunk	TD4, TDS-3, TDO-4
29" trunk	TD4, TD4T, TDS-3, TDS-3.5, TDO-4, TDO-5, TDO-N-3.5, TDO-N-4

TB3Q-LP

TB3Q

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Brewing Capacity	Cord Attached	Agencies
TB3 *(29" trunk)*	36700.0009	34" H x 11.6" W x 22" D (86.4cm H x 29.5cm W x 58.4cm D)	43 lbs. (19.5 kg)	120	14.4	1730	16.3 gal. (61.7 L)	Yes	UL LISTED, NSF
TB3 *(25.75" trunk)*	36700.0030	31" H x 11.6" W x 22" D (78.7cm H x 29.5cm W x 58.4cm D)	42 lbs. (19.1 kg)						
TB3 *(Ready Light, 29" trunk)*	36700.0055	34" H x 11.6" W x 22" D (86.4cm H x 29.5cm W x 58.4cm D)	43 lbs. (19.5 kg)						
TB3Q *(Quick Brew, 29" trunk)*	36700.0013		42 lbs. (19.1 kg)				26.7 gal. (101.1 L)		
TB3Q w/TD4T *(29" trunk)*	36700.0041		54 lbs. (24.5 kg)						
TB3Q *(Quick Brew, 25.75" trunk)*	36700.0059	31" H x 11.6" W x 22" D (78.7cm H x 29.5cm W x 58.4cm D)	41 lbs. (18.6 kg)						
TB3Q-LP	36700.0100	28.75" H x 11.5" W x 21.87" D (73cm H x 29.4cm W x 55.6cm D)	43 lbs. (19.5 kg)		14.2	1700			
TB3-LP	36700.0102				14.4	1730			
TB3 *(with Sweetener 29" trunk)*	36700.0043	34" H x 11.6" W x 22" D (86.4cm H x 29.5cm W x 58.4cm D)	44 lbs. (19.9 kg)		14.4	1730	16.3 gal. (61.7 L)		

Twin 3 Gallon Iced Tea Brewer

TB6

Fresh iced tea brewing solution with simple switch operation for a wide variety of dispensers

- Brews 16.3 to 26.7 gallons (61.7 to 101.1 litres) per hour from real tea leaves.
- Meet your volume needs; brew 3 gallons (11.4 litres) of iced tea into each dispenser and serve up to 6 gallons (22.7 litres) within a narrow footprint.
- Specifically designed to accommodate and brew into two BUNN Narrow Tea Dispensers *(can also brew directly into standard tea dispensers)*.
- Includes rotating brew basket, base platform adapter, dedicated dilution nozzles and brew selection switch.
- Color coded decals help the operator properly align the brew basket, dispenser and choose the correct selection.
- Quickbrew (Q) model available for shorter brewing cycles.
- TB6 has adjustable steep time for more control over flavor extraction.

Dispensers sold separately, see page 54.

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Brewing Capacity	Cord Attached	Agencies
TB6	36700.0300	34" H x 12.2"W x 22.6"D (86.4cm H x 30.9cm W x 57.4cm D)	43 lbs. (19.5 kg)	120	14.4	1730	16.3 gal. (61.7 L)	Yes	UL LISTED NSF
TB6Q	36700.0301						26.7 gal. (101.1 L)		

Infusion Series® Tea and Coffee Brewers

ITCB

ITCB

ITCB	Tea Dispensers
25.75" trunk	TD4, TDS-3, TDO-4
29" trunk	TD4, TD4T, TDS-3, TDS-3.5, TDO-4, TDO-5, TDO-N-3.5, TDO-N-4

Space-saving combination brewer yields a variety of beverages with Digital Brewer Control and precise extraction control

- Large tank provides back-to-back brewing capacity and allows 3 or 5 gallon (11.4 to 18.9 litres) tea batches.
- Two programmable batch switches allow full and half batch brewing of iced tea.
- Brews into all BUNN iced tea dispensers *(except TDS-5)* and 1.9 to 3.8 litre airpots.
- BrewWISE® intelligence.
- Brew counter for batches brewed.
- Equipped with tank drain.
- Black plastic coffee funnel and separate tea funnel.
- Stainless steel Smart Funnel® available. Product No. 32643.0000
- Compatible with BUNNlink®.
- Use BUNN paper filters - Product No. 20100.0000.

SWEETENER MODEL

- Independently set each brew button's sweetener.
- Adjust sweetener volume with the Sweet Meter.
- "Out of Sweetener" indicator
- Separate sweetener inlet - use existing CO_2 systems or external 3rd party pump for sweetener delivery.

Airpots and dispensers sold separately, see pages 23 and 54.

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Coffee Brewing Capacity	Tea Brewing Capacity	Cord Attached	Agencies
ITCB-DV *(29" trunk)*	35700.0000	34.04" H x 10.12" W x 23.22" D (86.5cm H x 25.7cm W x 58.98cm D)	50 lbs. (27.2 kg)	120	14	1700	4.5 gal. (17 L)	26.7 gal. (101 L)	Yes	UL LISTED, NSF
ITCB-DV *(29" trunk, flip tray)*	35700.0019			120/208	13	2650	7.5 gal. (28.4 L)			
				120/240	15	3500				
ITCB-DV *(25.75" trunk)*	35700.0001	30.87" H x 10.12" W x 23.22" D (78.4cm H x 25.7cm W x 58.98cm D)		120	14	1700	4.5 gal. (17 L)			
ITCB-DV *(25.75" trunk, Sweetner)*	35700.0033									
ITCB-DV *(25.75" trunk, flip tray)*	35700.0020			120/208	13	2650	7.5 gal. (28.4 L)			
				120/240	15	3500				
ITCB-DV *(29" trunk, 7-hole sprayhead)*	35700.0002	34.04" H x 10.12" W x 23.22" D (86.5cm H x 25.7cm W x 58.98cm D)		120	14	1700	4.5 gal. (17 L)			
				120/208	13	2650	7.5 gal. (28.4 L)			
				120/240	15	3500				
Tall Booster	35976.0003	13.8" H x 9" W x 12.75" D (35.1cm H x 22.9cm W x 32.3cm D)	6 lbs. (2.7 kg)							
Short Booster	35976.0002	10.55" H x 9" W x 12.75" D (26.8cm H x 22.9cm W x 32.3cm D)								

Infusion Series® Tea and Coffee High Volume Brewers

ITCB-Twin HV

ITCB-DV HV

Space-saving combination brewer yields a variety of beverages with Digital Brewer Control and precise extraction control

- Large tank provides back-to-back brewing capacity and allows 3 or 5 gallon (11.4 to 18.9 litres) tea batches.
- Two programmable batch switches allow full and half batch brewing of iced tea.
- Brews into all BUNN iced tea dispensers *(except TDS-5)* and 1.9 to 3.8 litre airpots.
- BrewWISE® intelligence.
- Brew counter for batches brewed.
- Equipped with tank drain.
- Black plastic coffee funnel and separate tea funnel.
- Stainless steel Smart Funnel® available. Product No. 32643.0000
- Compatible with BUNNlink®.
- Use BUNN paper filters - Product No. 20100.0000.

ITCB-TWIN HV

- Independently set each brew button's sweetener.
- Adjust sweetener volume with the Sweet Meter.
- "Out of Sweetener" indicator
- Separate sweetener inlet - use existing CO_2 systems or external 3rd party pump for sweetener delivery.

Servers and dispensers sold separately, see pages 27-28, and 54.

NOTE: Catalog icon legend can be found on page 1.

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Coffee Brewing Capacity	Tea Brewing Capacity	Cord Attached	Agencies
ITCB-DV HV	43000.0000	34.4" H x 10.12" W x 23.8" D (87.4cm H x 25.7cm W x 60.5cm D)	55 lbs. (24.9 kg)	120	14	1700	5.1 gal. (19.3 L)	26.7 gal. (101 L)	Yes	UL LISTED NSF
				208	13.8	2900	8.9 gal. (33.7 L)			
				240	16.8	4050	11.9 gal. (45.05 L)			
ITCB- Twin HV	35700.0001	34.4" H x 20.1" W x 23.8" D (87.4cm H x 51.2cm W x 60.5cm D)	55 lbs. (24.9 kg)	120	14	1700	4.5 gal. (17 L)			

Iced Tea and Iced Coffee Brewer and Dispensers

TCD-1

TCD

- Venturi valve creates siphon that pulls product through to mixing valve.
- Rear shut-off valve for cleaning dispenser.
- Accepts one gallon (3.8 litre) jugs in top of container or BIB.
- Built-in pressure regulator provides consistent product-to-water ratio.
- Mixes a range of 5:1 to 15:1 concentrate to water ratio.
- For use with tea concentrate only.

TCD-2

IC3

IC3

- Brews directly into any style portable server up to 20" tall (50.8 cm).
- Height is easily changed by adding or removing trunk extensions.
- Brew either 2 or 3 gallons (7.57 to 11.36 litres) of iced coffee at a time.
- Tailors flavor to customer preference.

TU5Q

5 GALLON TEA BREWER

- Generates top profits through large volume sales.
- Brew either 3 or 5 gallons (11.36 to 18.93 litres) of iced tea at a time.
- Can be set up to brew concentrate only for easier transport.

Dispensers sold separately, see page 54.

TEA CONCENTRATE DISPENSERS								
Model	Product #	Dimension	Weight	Volts	Amps	Watts	Dispensing Capacity	Agencies
TCD-1	37750.0000	22.9" H x 12.8" W x 18.1" D (58.2cm H x 32.5cm W x 46cm D)	17.1 lbs. (7.8 kg)	No electrical required			45 gal. (170.3 L)	NSF
TCD-2	37750.0002	22.9" H X 12.8" W X 18.9" D (58.2cm H x 32.5cm W x 48cm D)	19.6 lbs. (8.9 kg)				67 gal. (253.6 L)	

ICED COFFEE BREWERS									
Model	Product #	Dimension	Weight	Volts	Amps	Watts	Brewing Capacity	Cord Attached	Agencies
IC3	24450.0000	37.1" H x 12" W x 24" D (94.2cm H x 30.5cm W x 60.96cm D)	58 lbs. (26.3 kg)	120/208	19.5	4050	20 gal. (75.7 L)	No	NSF, c UL us LISTED
Trunk Extension & Rear Panel	24427.0000		.08 lbs. (.04 kg)	Needed to accommodate the taller ICD4T dispenser.					
5 GALLON ICED TEA BREWERS									
TU5Q	24400.0000	38.5" H x 11.5" W x 24" D (97.8cm H x 29.6cm W x 60.96cm D)	51 lbs. (23.2 kg)	120	15	1800	28.5 gal. (107.9 L)	Yes	UL LISTED, NSF

Iced Tea/Coffee Dispensers

TDO-4

TD4

TD4T

TDS-5

ICD-3

LP Stand

TDO-3.5 LP

TDO-5

TDO-N-3.5

4 GALLON SQUARE TEA DISPENSERS						
Model	Product #	Dimension	Weight	Capacity	Handles	Agencies
TD4 *(solid lid)*	03250.0003	17.1" H x 9.1" W x 15.7" D (43.4cm H x 23.1cm W x 39.9cm D)	12 lbs. (5.4 kg)	4 Gallons (15.1 L)	Side	NSF
TD4 *(brew-through lid)*	03250.0006		11 lbs. (5.0 kg)			
TD4T *(solid lid, tall)*	03250.0004	22" H x 9.1" W x 15.7" D (55.9cm H x 23.1cm W x 39.9cm D)	13 lbs. (5.9 kg)			
TD4T *(brew-through lid, tall)*	03250.0005					
TD4T *(brew-through lid, tall, no decal)*	03250.0018					
43, 3.5, 4 GALLON CYLINDER STYLE TEA/COFFEE DISPENSERS						
TDS-3	33000.0000	19" H x 9.8" W x 12.8" D (48.3cm H x 24.9cm W x 32.5cm D)	9.4 lbs. (4.3kg)	3 Gallons (11.4 L)	Side	NSF
TDS-3.5	33000.0008	20.4" H x 9.8" W x 12.8" D (51.8cm H x 24.9cm W x 32.5cm D)	10 lbs. (4.5kg)	3.5 Gallons (13.2 L)		
TDS-5	33000.0001	25.6" H x 9.8" W x 14.8" D (65cm H x 37.8cm W x 37.6cm D)	12 lbs. (5.4 kg)	5 Gallons (18.9 L)		
ICD-3	33000.0002	20.6" H x 9.8" W x 14" D (52.3cm H x 37.8cm W x 35.6cm D)	10 lbs. (4.5kg)	3 Gallons (11.4 L)		
TDO-5	34100.0001	22" H x 10.7" W x 13.7" D (55.9cm H x 27.2cm W x 34.8cm D)	12 lbs. (5.4 kg)	5 Gallons (18.9 L)		
TDO-5 *(brew-through lid)*	34100.0003		14 lbs. (6.4 kg)	5 Gallons (18.9 L)		
TDO-4	34100.0000	19" H x 10.7" W x 13.7" D (48.3cm H x 27.2cm W x 34.8cm D)	12 lbs. (5.4 kg)	4 Gallons (15 L)		
TDO-4 *(brew-through lid)*	34100.0002					
TDO-3.5 *(low profile)*	37100.0000	9.75" H x 10.7" W x 13.7" D (24.8cm H x 27.2cm W x 34.8cm D)	8 lbs. (3.6 kg)	3.5 Gallons (13.2 L)		
TDO-N-3.5	39600.0001	21.6" H x 6.2" W x 13.5" D (54.9cm H x 15.7cm W x 34.3cm D)	12.3 lbs. (5.6 kg)	3.5 Gallons (13.2 L)	Front/Back	
TDO-N-4	39600.0002	21" H x 6.1" W x 23.6" D (53.3cm H x 15.2cm W x 60cm D)		4 Gallons (15 L)		
LP Server Stand	37675.0001	9.3" H x 11.5" W x 14" D (23.5cm H x 29.2cm W x 35.6cm D)	8.6 lbs. (3.9 kg)			

iMIX® Dispensers with 3 Hoppers

iMIX-3

Sleek, eye-catching powdered beverage dispenser featuring advanced mixing technology delivers exceptional hot drinks

- Three, 8-pound (3.6 kg) hoppers.
- Lighted front graphics for merchandising.
- Large 4.4 gallon hot water tank.
- Cup clearance of 7.25" (18.4 cm).
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access for easy service, set up and calibration.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Left, right or top-hinged door option.
- High speed, heavy-duty whipper for complete product mixing.

iMIX

- Low powder product detection system.
- RPM feedback.
- Night mode prevents pilferage.
- Compatible with BUNNlink®.

iMIX-3S+

- Set as push and hold or single size portion control.
- Display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.

Top hinge units available | iMIX-3 PC | iMIX-3S | iMIX-3S+

Chai Display
Product No.: 37457.0001

Hot Chocolate Display
Product No.: 37457.0002

Steamer Display
Product No.: 37457.0003

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Display	Finish	Capacity	Cord Attached	Agencies
iMIX-3	36900.0000	32.8" H x 12.6" W x 24.1" D (83.3cm H x 32cm W x 61.2cm D)	90 lbs. (40.8 kg)	120	15	1800	Cappuccino	Black	4.5 gal. (17 L)	Yes	NSF, ETL
	36900.0001							SST			
	36900.0003						Steamer	Black			
	36900.0004						Hot Chocolate				
	36900.0005						Specialty Tea				
iMIX-3 PC	36900.0002	35.1" H x 12.6" W x 24.1" D					Cappuccino				
iMIX-3S	38600.0000										
iMIX-3S+	38600.0001										
iMIX-3	36900.0050	*(top hinge unit)* 35.1" H x 12.6" W x 24.1" D (89.2cm H x 32cm W x 61.2cm D)									
iMIX-3S	38600.0051										
iMIX-3S+	38600.0050										

iMIX® Dispensers with 4 or 5 Hoppers

iMIX-5

Sleek, eye-catching powdered beverage dispenser featuring advanced mixing technology delivers exceptional hot drinks

- iMIX-5: Five, 8-pound (3.6 kg) hoppers
  iMIX-4: Four, 8-pound (3.6 kg) hoppers
- Lighted front graphics for merchandising.
- 7.3 gallon (27.63 litre) hot water tank.
- Cup clearance of 7.25" (18.4 cm).
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second).
- High speed, heavy-duty whipper.
- Front of machine access for easy service.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Lighted front graphics for merchandising.
- Left, right or top-hinged door option.
- Easily removable side panels for complete access to service components.
- Compatible with BUNNlink®.

iMIX-5

- Low powder product detection system.
- RPM feedback.
- Night mode prevents pilferage.

iMIX-5S+

- Set as push and hold or single size portion control.
- Display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.

iMIX-4

iMIX-5S

iMIX-5S+

Top hinge units available

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Finish	Capacity	Cord Attached	Agencies
iMIX-4	37000.0004	32.8" H x 19.5"W x 24" D (83.3cm H x 49.5cm W x 61cm D)	132 lbs. (59.9 kg)	120	15	1800	Black	4.5 gal. (17 L)	Yes	NSF, ETL US
iMIX-5	37000.0000	32.8" H x 19.5"W x 24" D (83.3cm H x 49.5cm W x 61cm D)	135 lbs. (61.2 kg)							
iMIX-5S	38100.0000	32.8" H x 19.5"W x 24" D (83.3cm H x 49.5cm W x 61cm D)								
iMIX-5S+	38100.0003									
iMIX-4	37000.0050	(top hinge unit) 35.1" H x 19.5"W x 24" D (83.3cm H x 49.5cm W x 61cm D)	132 lbs. (59.9 kg)							
iMIX-5	37000.0020		135 lbs. (61.2 kg)							
iMIX-5S	38100.0075									
iMIX-5S+	38100.0050									

Fresh Mix Dispensers

FMD-5

- FMD-1: One, 8-pound (3.6 kg) hopper
  FMD-2: Two, 4-pound (1.81 kg) hoppers
  FMD-3: Three, 4-pound (1.81 kg) hoppers
  FMD-4: One, 8-pound (3.6 kg) hopper;
  Three, 4-pound (1.81 kg) hoppers
  FMD-5: Five, 4-pound (1.81 kg) hoppers
- Variable speed hopper motors offer a wide range of product mix ratios (.75 to 6.6 grams of powder per second).
- Lighted graphics for merchandising.
- Adjustable legs and drip tray allow up to 7" (17.8 cm) opening for serving cup.
- Specially designed mixing system guarantees perfect beverages every time.
- Improved automatic rinse reduces run-on after beverage is dispensed.
- Electrical and plumbing components easily accessible through front and top.

FMD DBC DISPENSER

- Easy-to-program, one-touch portion control for three cup sizes.
- Fast fill – perfect for quick service restaurants.
- Each mixing chamber has independent powder to water ratio.
- System setup is password protected.
- Simple setup and hopper throw calibration system.

FMD-1

FMD-2

FMD-3

FMD-3

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Display	Capacity	Cord Attached	Agencies
FMD-1 BLK	SET00.0196	30" H x 7.9" W x 21" D (76.2cm H x 20.1cm W x 53.3cm D)	75 lbs. (34 kg)	120	15	1800	Standard	4.2 gal. (15.9 L)	Yes	NSF, ETL
	SET00.0203						Hot Chocolate			
FMD-2 BLK	SET00.0200		81 lbs. (36.7 kg)				Standard			
	SET00.0207						Mug Display			
FMD-3 BLK	SET00.0197	30" H x 11.3" W x 23.3" D (76.2cm H x 28.7cm W x 59.2cm D)	86 lbs. (39.0 kg)				Café Latte			
FMD-3 SST	SET00.0198									
FMD-3 Soup	28600.0000		84 lbs. (38 kg)				Soup			
FMD-3 DBC BLK	29250.0000		85 lbs. (38.6 kg)				Café Latte			
FMD-4 BLK	34900.0002	29.3" H x 18.6" W x 21.2" D (74.4cm H x 47.2cm W x 53.8cm D)	118 lbs. (53.5 kg)				Cappuccino			
FMD-5 BLK	34900.0000		123 lbs. (55.8 kg)							

iMIX® Hot and Iced Beverage Dispenser

iMIX-5S+ H&C

Top hinge
unit available

Sleek powdered beverage dispenser featuring advanced mixing technology delivers exceptional hot or cold drinks

- 3 dispense nozzles for hot drinks and 2 for iced cappuccino with split hot/iced cappuccino lighted display.
- Capacity: five, 8-pound (3.6 kg) hoppers.
- Large, lighted front graphics for merchandising.
- One 3 gal. (11.35L) and one 2 gal (7.57L) hot water tank, with individually controlled thermostats, adjustable from 50° to 200°F, for optimum drink quality for hot and cold products.
- Cup clearance at 7.25" (18.4 cm) to accommodate popular cup sizes [adjustable to 8.12" (20.6 cm)].
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second).
- Key service components easily accessible through front, top, and sides.
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access to tank drain, dump valves, auger and whipper motors and control board for easy service.
- Key lock on the door prevents tampering.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Can be set as push and hold or single size portion control.
- Display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Finish	Capacity	Cord Attached	Agencies
iMIX-5S+	40900.0000	32.8" H x 19.5"W x 24" D (83.3cm H x 49.5cm W x 61cm D)	135 lbs. (61.2 kg)	120	15	1800	Black	4.5 gal. (17 L)	Yes	NSF, ETL US
	40900.0050	(top hinge unit) 35.1" H x 19.5"W x 24" D (83.3cm H x 49.5cm W x 61cm D)								

Cold Beverage Systems - Juice

JDF-2S PC LD
(Lighted Door with Portion Control)

Cold beverage dispenser with High Intensity® mixing delivers superior drinks consistently

- One dispenser delivers both frozen and ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN High Intensity® mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" cup clearance accommodates most juice containers.
- 8 lb. (3.6 kg) ice bank provides superior cold drink capacity.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Modular dispense deck makes service fast, simple.
- Both push-button and single-size portion control.
- Dual dispense model allows simultaneous dispense from both dispense heads *(juice display only)*.
- Three size portion control, lighted door models available.
- Lighted door units use high efficiency LED lighting.
- Preventive maintenance kit: 39690.0000.
- Extended drip tray 44015.1000. *(see page 73)*

JDF-2S

Model	Product #	Dimension	Weight	Volts	Amps	Lighted Display	Dispense	Capacity	Cord Attached	Agencies
JDF-2S *(with air filter)*	37900.0001	33.1" H x 10"W x 25.5" D (84.1cm H x 25.4cm W x 64.8cm D)	103 lbs. (46.7 kg)	120	4.5	No	push button	4 (5 oz.) drinks/min.	Yes	NSF, ETL
JDF-2S *(dual dispense)*	37900.0025									
JDF-2S LD	37900.0008					Yes				
JDF-2S *(dual dispense)*	37900.0026									
JDF-2S PC LD *(portion control)*	37900.0016									
JDF-2S LD *(dual dispense)*	37900.0027									

Cold Beverage Systems - Juice

JDF-4 PC LD
(Lighted Door with Portion control)

Cold beverage dispenser with High Intensity® mixing delivers superior drinks consistently

- One dispenser delivers both frozen and ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN High Intensity® mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" (17.8 cm) cup clearance accommodates most juice containers.
- 18 lb. (8 2 kg) ice bank provides superior cold drink capacity.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Two modular dispense decks makes service fast and simple.
- Both push-button and single-size portion control in the same machine.
- Three size portion control, lighted door models available.
- Door lock standard.
- Cold water option available.
- Lighted door units use high efficiency LED lighting.
- Preventive maintenance kit: 39690.0000.
- Extended drip tray 40789.1000. *(see page 73)*

JDF-4S

JDF-4 LD
(Lighted Door)

NOTE: Catalog icon legend can be found on page 1.

Model	Product #	Dimension	Weight	Volts	Amps	Lighted Display	Dispense	Capacity	Cord Attached	Agencies
JDF-4S	37300.0000	33.1" H x 15.7" W x 25.5" D (84.1cm H x 39.9cm W x 64.8cm D)	129 lbs. (58.5 kg)	120	6	No	push button	3 (12 oz.) drinks/min.	Yes	NSF, ETL
JDF-4S *(with cold water)*	37300.0002									
JDF-4S LD	37300.0004					Yes				
JDF-4S LD *(with cold water)*	37300.0006									
JDF-4S PC LD *(portion control)*	37300.0023									

Cold Beverage Systems - Iced Coffee

JDF-4S IC LD
(Lighted Door)

Cold beverage dispenser with High Intensity® mixing delivers superior drinks consistently

- One dispenser delivers both frozen and ambient products increasing profits by lowering costs.
- Drink consistency assured with the BUNN High Intensity® mixing technology.
- Pumps and mixes 2+1 to 11+1 concentrated beverages, including 4+1 high viscosity and 5+1 juices accurately and consistently.
- Quick dispense with 1.0 to 1.5 ounces (29.6 to 44.4 ml) per second flow rate.
- 7" cup clearance accommodates most juice containers.
- JDF-2 8 lb. (3.6 kg) and JDF-4 18 lb. (8.2 kg) ice bank provides superior cold drink capacity.
- Advanced concentrate pump designed for easy setup, accuracy and durability.
- Modular dispense deck makes service fast and simple.
- Both push-button and single-size portion control in the same machine.
- Dual dispense allow simultaneous dispense from both dispense heads *(juice display only)*.
- Three size portion control, lighted door models available.
- Lighted door units use high efficiency LED lighting.
- Preventive maintenance kit: 39690.0000.
- JDF-2S extended drip tray 44015.1000 and JDF-4S extended drip tray 40789.1000. *(see page 73)*

JDF-2S IC

JDF-2S IC LD
(Lighted Door)

JDF-4S IC

Model	Product #	Dimension	Weight	Volts	Amps	Lighted Display	Dispense	Capacity	Cord Attached	Agencies
JDF-2S *(Iced Coffee)*	37900.0002	33.1" H x 10"W x 25.5" D (84.1cm H x 25.4cm W x 64.8cm D)	103 lbs. (46.7 kg)	120	4.5	No	push button	4 (5 oz.) drinks/min.	Yes	NSF, ETL
JDF-2S LD *(Iced Coffee)*	37900.0009					Yes				
JDF-4S *(Iced Coffee)*	37300.0013	33.1" H x 15.7"W x 25.5" D (84.1cm H x 39.9cm W x 64.8cm D)	129 lbs. (58.5 kg)		6	No		3 (12 oz.) drinks/min.		
JDF-4S *(Iced Coffee)* *(with cold water)*	37300.0016									
JDF-4S LD *(Iced Coffee)*	37300.0020					Yes				

iMIX® Dispensers - Iced Coffee

iMIX-5 IC

Sleek, eye-catching powdered beverage dispenser featuring advanced mixing technology delivers exceptional cold drinks

- Three, 8-pound (3.6 kg) hoppers
- Lighted front graphics for merchandising.
- Large 4.4 gallon hot water tank.
- Cup clearance of 7.25" (18.4 cm).
- High speed, heavy-duty whipper for complete product mixing.
- Front of machine access for easy service, set up and calibration.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Left or right-hinged door option.
- Key service components easily accessible through front, top and side.
- High speed, heavy-duty whipper for complete product mixing.

IMIX AND IMIX-5

- RPM feedback.
- Night mode prevents pilferage.
- Compatible with BUNNlink®.

IMIX-3S+ AND IMIX-5S+

- Can be set as push and hold or single size portion control.
- Display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.

iMIX-3 IC

iMIX-3S+ IC

iMIX-5S+ IC

Iced Cappuccino Display
Product No.: 37457.0006

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Finish	Capacity	Cord Attached	Agencies
iMIX-3 IC	36900.0026	32.8" H x 12.6" W x 24.1" D (83.3cm H x 32cm W x 61.2cm D)	90 lbs. (40.8 kg)	120	15	1800	Black	4.5 gal. (17 L)	Yes	NSF, ETL
iMIX-3S+ IC	38600.0006									
iMIX-5 IC	37000.0002	32.8" H x 19.5" W x 24" D (83.3cm H x 49.5cm W x 61cm D)	135 lbs. (61.2 kg)							
iMIX-5S+ IC	38100.0010									

Ultra™ Gourmet Ice® Systems

Ultra-2

Frozen beverage dispenser with reversing auger technology for superior mixing and freezing

- Torque sensory technology maintains consistent product thickness for superior beverages.
- Reversing auger design quickens freeze time and reduces air mixing with product.
- Very simple to program, cleaning and preventive maintenance run with touch pad display.
- Internally monitored refrigeration system.
- Liquid autofill models available. Please contact your BUNN sales representative.
- Compatible with BUNNlink®.

ULTRA-2

- Full 2-year parts and 1-year labor warranty. 5-year parts and 1 year labor warranty on compressor and 3-year parts and labor warranty on electronics. See the product manual for additional details.

ULTRA-2 HP

Enhanced-performance frozen beverage dispenser shortens freeze down times

- High Performance versus standard model comparison:

  Ambient Room Temp. Ultra-2 HP is:
  70¼ F 17° Faster freeze down time
  80¼ F 21° Faster freeze down time
  90¼ F 32° Faster freeze down time

  Note: The higher the ambient temperature, the greater the improvement over the standard model.

Ultra-2

Ultra-2

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Finish	Capacity	Cord Attached	Agencies
ULTRA-2	34000.0000	31.9" H x 16" W x 24.5" D (81cm H x 40.6cm W x 62.2cm D)	137 lbs. (62.0 kg)	120	12	1440	Stainless/ White	2 Hoppers @ 3.0 gal. each	Yes	NSF, ETL
	34000.0001						Stainless/ Black			
	34000.0008						All Black			
	34000.0012						Stainless/ White			
	34000.0063	(painted frame, Spanish)								
ULTRA-2 *(flat lid)*	34000.0013	29.9" H x 16" W x 24.5" D (75.96cm H x 40.6cm W x 62.2cm D)					Black			
ULTRA-2 HP	34000.0079	31.9" H x 16" W x 24.5" D (81cm H x 40.6cm W x 62.2cm D)					Stainless/ White			
	34000.0081						Stainless/ Black			
	34000.0080						All Black			
ULTRA-2 with Autofill Hoppers	34000.0067						Stainless/ White			
	34000.0068						All Black			
	34000.0069						Stainless/ Black			
	34000.0073	(painted frame, Spanish)					Black			

Ultra™ Gourmet Ice® Systems

Ultra-2 PAF

Frozen beverage dispenser with reversing auger technology for superior mixing and freezing

- Torque sensory technology maintains consistent product thickness for superior beverages.
- Reversing auger design quickens freeze time and reduces air mixing with product.
- Very simple to program and run with touch pad display, which also guides cleaning and preventive maintenance.
- Internally monitored refrigeration system.
- Liquid autofill models available. Please contact your BUNN sales representative.
- Compatible with BUNNlink®.

ULTRA-1

- Full 2-year parts and 1-year labor warranty. 5-year parts and 1 year labor warranty on compressor and 3-year parts and labor warranty on electronics. *(See the product manual for additional details.)*

ULTRA-2 PAF

- Powdered autofill product hoppers refill product at a rate of 1.1 fluid oz./sec.
- Full 3-year parts and labor warranty on electronics and 5-year parts warranty on compressor. *(See the product manual for additional details.)*
- High efficiency LED lighting system.

Ultra-1

AFPO-2 SL

(Autofill System - total pumping and metering system for liquid product)

Model	Product #	Dimension	Weight	Volts	Amps	Watts	Finish	Capacity	Cord Attached	Agencies
ULTRA-1	39800.0000	31.9" H x 7.9" W x 24.2" D (81cm H x 20.1cm W x 61.5cm D)	76.4 lbs. (34.7 kg)	120	7.5	900	SST/White	1 Hoppers @ 3.0 gal. each	Yes	NSF, ETL
	39800.0002						SST/Black			
	39800.0004						Black			
ULTRA-2 PAF	34000.0500	42" H x 16" W x 25" D (106.7cm H x 40.6cm W x 63.5cm D)	177.6 lbs. (80.6 kg)		12	1440	SST/White	5 lbs. dry product		NSF, ETL, ETL
	34000.0504 (no logo)						Black			
	34000.0501									
AFPO-2, SL	28400.0004	7.8" H x 17.5" W x 12.7" D (19.8cm H x 44.5cm W x 32.3cm D)	35 lbs. (15.9 kg)		4	480	Black	5 lbs. dry product		ETL, ETL
AFPO-2	28400.0007									

Precise Temperature Water Dispensers *(HW2, H5 and HW10)*

H5E-DV PC

- Pourover model tank size: 80 oz.. (2.37 litres)
- Precise temperature 72°-212°F (22.2°C-100°C) ensures consistent results. *(OHW models)*
- High quality, easy-to-clean stainless steel exterior and tank for a long life.
- Includes drip tray. *(HW2 and OHW models)*
- Includes dry-plug prevention for easy installation. *(H10X models)*
- Pourover model plugs into any 120 volt outlet, no plumbing needed.
- H5 models can be front or side wall mounted.
- Drip tray available for H5 models. Product No. 02497.0000

H10X

H5X

HW2

OHW

POURover & MEDIUM VOLUME MACHINES										
Model	Product #	Volts	Amps	Watts	°F Settings	Capacity	Dimension	Weight	Cord Attached	Agencies
OHW	02550.0003	120	8.6	1040	200	80 oz.. (2.37 L)	16.9" H x 6.5"W x 10.8"D (42.9cm H x 16.8cm W x 27.4cm D)	13 lbs. (5.9 kg)	Yes	UL LISTED NSF
HW2	02500.0001		15	1800		4.2 gal. (15.9 L)	24" H x 7.1"W x 14.3"D (60.96cm H x 18.03cm W x 36.3cm D)	23 lbs. (10.43 kg)		
HW2 Black	02500.0005									

LARGE VOLUME MACHINES											
Model	Product #	Volts	Amps	Watts	°F Settings	cold water input 35°	hot water input 140°	Dimension	Weight	Cord Attached	Agencies
H5E-18-120	12500.0020	120	15.4	1850	85/115	varies with application		28.5" H x 7.1" W x 17.5" D (72.4cm H x 18.03cm W x 44.5cm D)	32 lbs. (14.1 kg)	No	UL LISTED NSF
	12500.0033				72						
H5E-40-240	12500.0024	240	16.9	4050	200						
H5E-40-208	12500.0025	208	19.5								
H5E-DV PC	39100.0000	120	15.4	1850		3.7 gal. (14 L)	8.1 gal. (31 L)		35 lbs. (15.9 kg)		
		240	16.9	4050		7.3 gal. (27.6 L)	14.7 gal. (55.6 L)				
	39100.0001	120	15.4	1800	90	3.7 gal. (14 L)	8.1 gal. (31 L)				
H5X-DV PC	39100.0005	240	16.9	4050	212	7.3 gal. (27.6 L)	14.7 gal. (55.6 L)				
H5X-40-240	12500.0026				212				32 lbs. (14.1 kg)		
H5X-40-208	12500.0027	208	19.5								
H5X-18-120	12500.0028	120	15.4	1850		3.7 gal. (14 L)	8.1 gal. (31 L)				
H5X-60-208	12500.0032	208	29	6050		9.9 gal. (37.5 L)	18.6 gal. (70.4 L)		33 lbs. (15.0 kg)		
H5M-18-120	12500.0046	120	15.4	1850	200	3.7 gal. (14 L)	8.1 gal. (31 L)		44 lbs. (20.0 kg)		
H10X-80-208	26300.0001	208	38.7	8050	212	13.2 gal. (50 L)	24.8 gal. (93.9 L)	34.4" H x 10.2" W x 24.5"D (87.4cm H x 25.9cm W x 62.2cm D)	66.7 lbs. (30.3 kg)		
H10X-80-240	26300.0000	240	33.5								

Water Quality Filter Systems

EQHP-10

EQHP-25

EQHP-54

EQHP-ESP

Quality beverages begin with quality water

BUNN® water quality filtration systems, when used with BUNN brewing equipment, ensure that your customers are getting the best tasting beverage possible. The Easy Clear® filters are manufactured to BUNN specifications and address water problems such as taste and odor; sediment, limescale and hardness.

EQHP-SFTN

EQHP-TEA

EQHP-Twin 70L

EQHP-Twin 108SP

Scale-Pro®

New EQHP Model #	New EQHP Part #	New Configuration Capacity @ Flow Rate	Replacement Cartridges
EQHP10L	39000.0001	10000 gal @ 1.5 gpm	39000.1001
EQHP10	39000.0004	10000 gal @ 1.5 gpm	39000.1004
EQHP25L	39000.0002	25,000 gal @ 2.1 gpm	39000.1002
EQHP25	39000.0005	25,000 gal @ 2.1 gpm	39000.1005
EQHP35L	39000.0011	35,000 gal @ 3.34 gpm	39000.1011
EQHP54L	39000.0003	54,000 gal @ 5 gpm	39000.1003
EQHP54	39000.0006	54,000 gal @ 5 gpm	39000.1006
EQHP-TWIN 70L*	39000.0012	70,000 gal @ 6.68 gpm	(2) 39000.1011
EQHP-TWIN 108SP**	39000.0013	108,000 gal @ 10 gpm	(2) 39000.1006 (1) 39000.1010
Scale-Pro	39000.0010	Recommended 6 month change-out	39000.1010
EQHP-ESP	39000.0008	422 gal @10.5 gpg @.5gpm	39000.1008
EQHP-SFTN	39000.0009	1350 grains	39000.1009
EQHP-TEA	39000.0007	4350 grains	39000.1007

**Requires two (2) cartridges; **Requires three (3) cartridges*

Paper Filters

RESPECT EARTH®

Selection of coffee filters is a vital step in brewing perfect coffee - don't settle for anything less than BUNN quality coffee filters. Using the results of years of research, BUNN manufactures the best filters from high quality, heavy weight paper, so the water flows properly through the coffee. BUNN filters are uniquely designed for strength so the sides are taller, and you don't end up with overflow and grounds in your coffee.

BUNN's paper stock used in the manufacturing of our coffee filters is produced using an elemental chlorine-free (ECF) bleaching method.

NOTE: Catalog icon legend can be found on page 1.

Filter Type	Product #	Description	Number per Bag	Bags per Case	Number Cluster	Overall Measure x Base Diameter (inches)	Packed per Case	Case Weight (lbs./kg)	Cases per Skid/Tier
Decanter Filters	20115.0000	Regular C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	9 3/4 x 4 1/4	1000	4.2/1.91	180/15
	20116.0000	Regular Narrow C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	9 1/2 x 3 1/4	1000	4.2/1.91	180/15
	20122.0000	Regular Fast Flow C, S, R, O, VLPF, VPR, VPS, VP-17	500	2	50	9 3/4 x 4 1/4	1000	4.5/2.04	180/15
	20106.0000	A10/Retail - 8 & 10 cup brewers	500	2	50	8 1/2 x 3	1000	3.4/1.54	231/21
Urn Filters	20109.0000	Urn - U3, SRU, IC-3	252	1	36	17 3/4 x 7 1/4	252	5.5/2.49	88/11
	20112.0000	Narrow Base Urn	250	1	25	18 1/2 x 6 1/4	250	5.5/2.49	88/11
	20124.0000	Urn, 3 gallon	252	1	36	19 x 7 1/4	252	6.1/2.77	88/11
	20111.0000	Urn, 6 gallon	252	1	36	20 x 7 3/4	252	6.6/2.99	84/12
	20125.0000	Urn, 6 gallon	250	1	25	21 x 8 3/4	250	7.5/3.4	72/9
	20113.0000	Urn, 10 gallon	250	1	25	23 3/4 x 8 3/4	250	9.3/4.22	54/9
	20131.0000	Urn, 10 gallon	252	1	36	24 1/4 x 10 3/4	252	9.7/4.40	36/6
Other Filters	20120.0000	System III	252	2	36	15 1/8 x 5 3/8	504	8.5/3.86	108/12
	20100.0000	Tea - Tea Brewers, Single & Dual Coffee brewers, 1 1/2 gallon urns, ITCB, system II	500	1	50	12 3/4 x 5 1/4	500	4.7/2.13	150/15
	20157.0000	Gourmet C Funnel		2		12 1/2 x 4 3/4	1000	8.25/3.74	60
	20138.0000	Gourmet - Iced Tea, Dual, Dual SH, Dual TF, 1 1/2 gallon urns	252		36	13 3/4 x 5 1/4	504	5.5/2.49	108/12

Coffee Decanters and Warmers

WL2 with Easy Pour®

Easy Pour® is an exclusive BUNN design that assures convenient serving with a drip-proof, fast pouring lip from front or either side

EASY POUR®

- Container and handle are a one piece molded design for extra strength and durability.
- Clear, high-impact-resistant material complies with FDA regulations for food contact.
- Base is high quality stainless steel.
- Easy Pour® decanters can be private labeled. Please contact your BUNN sales representative for more information.

WARMER

- Warmers are an ideal way to merchandise the aroma and appearance of your fresh-brewed coffee in decanters at remote serving stations.
- Complete line of single, side-by-side and step-up warmers to fit your serving needs.
- Each warmer has a separate "on/off" switch and maintains coffee at optimum serving temperature.

Glass and Stainless

NCD Decanter

WX1

WX2

WS2

DECANTERS					
Model	Product #	Handle	Shipping Weight	Number in Case	Agency
Easy Pour 64 oz..	06100.0101	Black	1.0 lb. (0.5 kg)	1	
	06101.0101	Orange			
Glass 64 oz..	06078.0001	Black			
	06088.0001	Orange			
Stainless 64 oz..	06026.0000	Black	1.5 lbs. (0.7 kg)		
	06041.0000	Orange			
NCD 64 oz..	34116.0001	Black	1.0 lb. (0.5 kg)		

WARMERS							
Model	Product #	Finish	Number of Warmers	Shipping Weight	Brewer	Dimension	Agency
WS2	12882.0004	Stainless	Two	7 lbs. (3.2 kg)	For use with S, ST & STF brewers	6" H x 7.5" W x 17.8" D (15.24cm H x 19.05cm W x 45.21cm D)	
	12882.0006	Black					
WL2	11402.0001	Stainless			For use with C, CW & VP17, etc. brewers	5.2" H x 8" W x 18" D (13.21cm H x 20.32cm W x 45.72cm D)	
	11402.0004						
	11402.0006	Black					
WX1	06450.0004	Stainless	One	3 lbs. (1.4 kg)	For use with S, ST & STF brewers	6.5" W x 2.53" H x 7" D (16.51cm W x 6.4cm H x 17.8cm D)	
WX2	06310.0004		Two	4 lbs. (1.8 kg)	For use with S, ST & STF brewers	14" W x 2.53" H x 7" D (35.6cm W x 6.4cm H x 17.8cm D)	

Universal Airpot Racks and Coffee-iser

Coffee-iser with
UNIV-6 APR

Colorful, versatile merchandising system for airpots

AIRPOT RACKS

- Holds push-button or lever-action airpots.
- Displays can be combined or taken apart easily for greater flexibility.
- Sturdy, carbon-steel wire construction with vinyl coating resists corrosion, easy to clean.
- Sponge-lined trays to catch drips and spills.

** Please refer to specification sheets found on-line at www.bunn.com for detailed drawings.*

COFFEE-ISER

- Sturdy, rotationally molded black plastic base.
- Vinyl coated to resist corrosion and extend life.
- Holds 2.2 liter to 3.0 liter airpots.
- Sponge-lined trays to catch drips and spills.
- Full color graphics and light kit for maximum merchandising.
- Available in a variety of single item pieces or combination sets.

UNIV-2 APR

UNIV-2 APR

UNIV-3 APR

UNIVERSAL AIRPOT RACKS				
Model	Product #	Dimension	Weight	Capacity
UNIV-2 APR	35728.0000 *(1 upper, 1 lower)*	14.1" H x 7.5"W x 24.1" D (35.8cm H x 19.1cm W x 61.2cm D)	5 lbs. (2.3 kg)	2 airpots
	35728.0001 *(2 lower)*	6.9" H x 14.9"W x 11.2" D (17.5cm H x 37.9cm W x 28.5cm D)	4.5 lbs. (2 kg)	
UNIV-3 APR	35728.0002 *(3 lower)*	6.9" H x 22.9"W x 11.2" D (17.5cm H x 58.2cm W x 28.5cm D)	6 lbs. (2.7 kg)	3 airpots
UNIV-4 APR	35728.0003 *(2 upper, 2 lower)*	14.0" H x 14.9"W x 24.9" D (35.6cm H x 37.9cm W x 63.3cm D)	10 lbs. (4.5 kg)	4 airpots
UNIV-5 APR	35728.0004 *(3 upper, 2 lower)*	14.0" H x 22.9"W x 24.9" D (35.6cm H x 58.2cm W x 63.3cm D)	13 lbs. (5.9 kg)	5 airpots
UNIV-6 APR	35728.0005 *(3 upper, 3 lower)*	14.0" H x 22.9"W x 24.9" D (35.6cm H x 58.2cm W x 63.3cm D)	15 lbs. (6.8 kg)	6 airpots
COFFEE-ISER				
Advantage Coffee-iser	SET00.0076	53" H x 22" W x 23" D (134.6cm H x 55.9cm W x 58.4cm D)	23 lbs. (10.4 kg)	6 airpots
Advantage Decanter Coffee-iser	SET00.0077		10 lbs. (4.5 kg)	
Base-X	27908.0000	10.3" W x 22" H x 23" D (26.2cm W x 55.9cm H x 58.4cm D)	3.4 lbs. (1.5 kg)	6 airpots
Standard Background	27909.0000		7 lbs. (3.2 kg)	
Light Kit	27940.0000		1 lb. (.5 kg)	
Standard ID Tags	27912.0000			
Wire Stand *(for decanters)*	28189.0000		2 lbs. (1 kg)	

Stock Funnels

BLACK PLASTIC FUNNEL
Product #: 04040.0004
- For use with A10 brewer.

BLACK PLASTIC SPLASHGARD® FUNNEL WITH DECALS
Product #: 20583.0003
- For use with CDBC, CWT, AXIOM® and SmartWAVE® brewers.

BLACK PLASTIC ITCB FUNNEL
Product #: 03021.0008
- For use with ITCB when brewing coffee.

BLACK PLASTIC SINGLE/DUAL FUNNEL
Product #: 22735.0000
- For use with Single®, Dual® and Soft Heat® brewers.

STAINLESS STEEL SPLASHGARD® FUNNEL
Product #: 20216.0000 (7.12 inch width)
- For use with CDBC, CWT AXIOM® and SmartWAVE® brewers.

Product #: 20217.0000 (7.62 inch width)
- For use with CDBC Twin, CWT Twin and AXIOM® Twin brewers.

STAINLESS STEEL DUAL/SINGLE FUNNEL
Product #: 20201.1201
- For use with Single®, Dual®, and Soft Heat® brewers.

SMART FUNNEL®
Product #: 32643.0000
- For use with BrewWISE® ThermoFresh®, Soft Heat®, DBC® and ICB brewers.

TITAN™ FUNNEL
Product #: 40114.0000
- For use with Titan™ brewers

URN FUNNEL
Product #: 07022.0012
- For use with SRU and U3 brewers

GOURMET C FUNNEL
Product #: 34559.0000 (7.12 inch width)
- For use with CDBC, CWT AXIOM® and SmartWAVE® brewers

Product #: 34559.0001 (7.62 inch width)
- For use with CDBC Twin, CWT Twin and AXIOM® Twin brewers
- Universal design – handle may be moved to appropriate side
- Allows brewing with heavier throw weights of coffee.

TRANSLUCENT FUNNEL
Product #: 20583.0002 (standard)
- For use with S, VP, and CWTF brewers

Product #: 29351.0000 (wide)
- For use with F, O, R, and X brewers

TRANSLUCENT TEA FUNNEL
Product #: 03021.0004 (standard)
- For use with ITCB, TB3 and TU3 brewers

Product #: 03021.0005 (quick dispense)
- For use with ITB, TB3Q and TU3Q brewers

TRANSLUCENT DUAL DILUTION TEA FUNNEL
Product #: 03021.0013 (standard)
- For use with TB6 brewer

Product #: 03021.0014 (quick dispense)
- For use with TB6Q brewer

NOTE: All funnels shown *(excluding #04040.0004)* are designed with SplashGard® to help deflect hot liquids away from the hand.

Special Purpose Funnels

TRANSLUCENT TEA FUNNEL

Product #: 03021.0005
- For use with (quick dispense) TU3Q.

Product #: 03021.0005
- For use with TU3, TB3, and ITCB.
- SplashGard® deflects hot liquids away from the hand when removed.

TRANSLUCENT POUCH PACK FUNNEL

Product #: 20583.0003
- For use with TU3, TU3Q, TB3, and ITCB.
- Use with rectangular tea pouch pack.
- See through material guards against hot water spills when removed.

UNIVERSAL STAINLESS POUCH PACK FUNNEL

Product #: 29151.0000 (black handle)
Product #: 29151.0001 (orange handle)
- Interchangeable handle allows use in all BUNN decanter brewers.

POUCH PACK FUNNEL FOR SATELLITE BREWERS

Product #: 35282.0000 (black)
- For Duals and Singles.



POUCH PACK FUNNEL - SMALL BREW CHAMBER

Product #: 02074.0010 (black)
- For use with F, O, R & X brewers.

Product #: 04274.0012 (black)
Product #: 04274.0010 (brown)
- For use with S, VP, & CWTF brewers.

POUCH PACK FUNNEL - LARGE BREW CHAMBER

Product #: 02074.0010 (black)
- For use with F, O, R & X brewers.

Product #: 02774.0011 (black)
Product #: 02774.0010 (brown)
- For use with S, VP, & CWTF brewers.

GOURMET C FUNNEL

Product #: 34559.0000 (7.12 inch width)
- For use with CDBC, CWT AXIOM® and SmartWAVE® brewers

Product #: 34559.0001 (7.62 inch width)
- For use with CDBC Twin, CWT Twin and AXIOM® Twin brewers
- Universal design – handle may be moved to appropriate side
- Allows brewing with heavier throw weights of coffee.

TRANSLUCENT COFFEE FUNNEL

Product #: 20583.0002 (standard)
- For use with S, VP, and CWTF brewers

Product #: 29351.0000 (wide)
- For use with F, O, R, and X brewers

Drip Trays

COFFEE EQUIPMENT

SINGLE®, SINGLE SH BREWERS AND SINGLE SH STAND
Product #: 26830.0000 Kit
Product #: 26918.1000 Drip Tray
Product #: 26801.0000 Drip Tray Cover

RWS1 WARMER
Product #: 20213.0103 Kit
Product #: 20213.0301 Bracket
Product #: 20213.0200 Drip Tray
Product #: 03229.0000 Drip Tray Cover

DUAL®, DUAL SH BREWERS AND 2SH STAND
Product #: 27150.0000 Kit
Product #: 26971.1000 Drip Tray
Product #: 26916.0000 Drip Tray Cover

RWS2 WARMER
Product #: 20213.0100 Kit
Product #: 20213.0200 Bracket
Product #: 20213.0200 Drip Tray
Product #: 03229.0000 Drip Tray Cover

DUAL® BREWERS
Product #: 20213.0101 Kit
- Includes Drip Tray, Drip Tray Cover, and Bracket.

LCR-3 HV
Product #: 41656.0000 Kit
- Includes Drip Tray, Drip Tray Cover, and Bracket.

THERMOFRESH® SERVER
Product #: 35008.0000 Drip Tray
Product #: 35014.0000 Drip Tray Cover

NEW THERMOFRESH® SERVER
Product #: 38931.0000 Drip Tray
Product #: 38932.0000 Drip Tray Cover

SRU COFFEE URN
Product #: 06465.0000 Kit
- Includes everythign shown.

U3 COFFEE URN
Product #: 07284.0000 Kit
Product #: 07286.0000 Drip Tray
Product #: 07285.0000 Drip Tray Cover

AIRPOT RACK
Product #: 25368.0000 Drip Tray
Product #: 25367.0000 Drip Tray Sponge Liner

HOT WATER SYSTEMS

HW2, H5M, H5E, AND H5X
Product #: 02497.0000 Kit
Product #: 02545.0000 Drip Tray Only
Product #: 02546.0000 Drip Tray Cover
Product #: 02547.0000 Foot, Rubber
(Not pictured. Four (4) are required.)

OHW
Product #: 02497.0001 Kit
Product #: 02571.0000 Drip Tray
Product #: 02572.0000 Drip Tray Cover
Product #: 02547.0000 Foot, Rubber
(Not pictured. Four (4) are required.)

Drip Trays

TEA DISPENSERS

TCD AND TDO
Product #: 38029.1000 Kit
Product #: 26801.0004 Drip Tray
Product #: 26801.0000 Drip Tray Cover

FRESH MIX DISPENSERS

FMD-1 AND FMD-2
Product #: 02571.0000 Drip Tray
Product #: 28966.0000 Drip Tray Cover

FMD-3
Product #: 28699.0000 Drip Tray
Product #: 28267.0000 Drip Tray Cover

FMD-4 AND FMD-5
Product #: 34716.0000 Drip Tray
Product #: 34717.0000 Drip Tray Cover

iMIX-3
Product #: 36984.0000 Drip Tray
Product #: 36985.0000 Drip Tray Cover

iMIX-4 AND iMIX-5
Product #: 36670.0000 Drip Tray
Product #: 36739.0000 Drip Tray Cover

GOURMET JUICE® SYSTEMS

JDF-2 *(CLOSEOUT)*
Product #: 33528.0000 Drip Tray
Product #: 34994.0000 Drip Tray Cover

JDF-2 S
Product #: 38765.0000 Kit
Product #: 38765.1000 Drip Tray
Product #: 26801.0000 Drip Tray Cover

JDF-2 S EXTENDED
Product #: 44015.1000 Kit
Product #: 26801.0000 Drip Tray Cover
- Increases cup clearance tp 10.25".

JDF-4
Product #: 33814.1001 Drip Tray
Product #: 33811.0000 Drip Tray Cover

JDF-4 S
Product #: 38764.1001 Kit



JDF-4 S EXTENDED
Product #: 40789.1000 Kit
Product #: 33811.0000 Drip Tray Cover
- Increases cup clearance tp 10.25".

GOURMET ICE® SYSTEMS

ULTRA-2 WHITE
Product #: 28086.0000 Drip Tray
Product #: 32068.0000 Drip Tray Cover

ULTRA-2 BLACK
Product #: 28086.0001 Drip Tray
Product #: 32068.0001 Drip Tray Cover

BUNNserve®

When you choose BUNNserve for your beverage equipment, you can be assured of service so you can serve the wonderful beverages your customers demand.

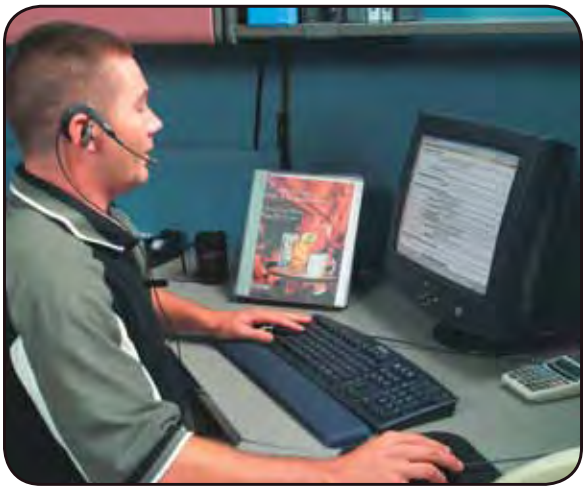

Choose between two service options:

Phone support – Standard operational support to operate equipment properly. Free with purchase of the equipment.

BUNNserve– Along with phone support, a full suite of onsite support services is available nationally. Your account is monitored so specific service needs are promptly met.

Service offerings include:

- Deployment and installation services
- Service dispatch available 24x7x365
- Preventive maintenance and calibration programs
- Single point of contact
- Service history reporting
- Asset reporting
- Web access to service order status

BUNNserve® MANAGED SERVICES

BUNNserve services are available with flexible pricing options

Services	Flat Rates	Standard Time & Material	National Rate Time & Material
Installations	✓	✓	✓
Removals	✓	✓	✓
Calibrations	✓	✓	✓
Preventive Maintenance	✓	✓	✓
Service Dispatch		✓	✓
Nationwide Equipment Rollouts	*	✓	✓

Flat Rates	One flat rate fee includes labor, travel, parts and management fee.
Standard Time & Material	Labor and travel are invoiced at variable, regional rates for actual hours worked, plus parts and a management fee.
National Rate Time & Material	Labor and travel are invoiced at national hourly rates for actual hours worked, plus parts and a management fee.

** Customized pricing available based on requirements.*

THE HOME BREWER COLLECTION

DISCOVER YOUR PERFECT CUP AT HOME.
f nd out what s brew ng at BunnAtHome.com.

VELOCITY BREW®

BUNN's trad t ona fast brewer a ways ready to de ver f avorfu hot coffee n about 3 m nutes.

PHASE BREW™

BUNN s new age brewer w th a 6-m nute heat ng & 4-m nute brew ng phase to ensure proper water temperature and contact t me for best resu ts.

MY CAFÉ® FOR HOME

BUNN s s ng e serve so ut on de vers café qua ty coffee & tea w th pods.

BUNN®

IT'S OUR MISSION TO HELP YOU BREW, AND ENJOY, YOUR PERFECT CUP.

BUNN®

Bunn-O-Matic Corporation
1400 Stevenson Drive • Springfield, IL 62703, USA
Phone: (800) 637-8606 or +1 (217) 529-6601
U.S. Fax: (800) 542-4967 • International Fax: +1 (217) 529-2827
www.bunn.com

E9000.0000F 1/11 © 2004 Bunn-O-Matic Corporation

RESPECT EARTH®

Our continuing focus on preserving the earth for future generations.